

RESEARCH ARTICLE

OPEN ACCESS

A MODIFIED RECTANGULAR L SHAPED SLOT WITH DGS MICROSTRIP PATCH ANTENNA FOR MIMO APPLICATION

¹NAGARAJ HANCHINAMANI ²Dr. C.R. BYRAREDDY

¹Ph.D Scholar, Dept of Electronics Engineering, Jain University Bangalore, India

²Professor, Dept of Electronics & Communication Engineering, BIT Bangalore, India

ABSTRACT: This letter presents the design of a compact size modified rectangular shaped microstrip line feed with DGS patch antenna is proposed here. DGS structure is used for improving the performance of microstrip patch antenna. The proposed compact size microstrip antenna consist of a microstrip feed line on one side of the substrate with defective ground structure with L shaped rectangular slot, other side of ground plane. The parameters of proposed antenna like returns loss, VSWR, radiation pattern, gain are simulated and analyzed using CST Microwave studio suit 2015. The antenna system resonates at 9.13GHz for VSWR=1. The proposed antenna is suitable for wireless communications employing MIMO techniques.

KEYWORDS: MPA (Microstrip Patch Antenna), VSWR, DGS (Defective Ground Structure)

Date of Submission: 10-02-2018

Date of acceptance: 28-03-2018

I. INTRODUCTION

Recently, demand on wireless communication has been rapidly increasing resulting in deployment of modern wireless communication systems such as Wi-Fi, WiMAX, and 3G/4G. Along with these applications, modern antennas are required to have small size and light weight. Antenna [1] is a transducer which transmits or receives electromagnetic waves. Microstrip antennas have several advantages over conventional microwave antenna and therefore are used in a variety of practical applications. Microstrip antenna was first introduced in the 1950s. However, this concept had to wait for about 20 years to be realized after the development of the printed circuit board (PCB) technology in the 1970s. microstrip antennas are the most common types of antennas with wide range of applications due to their apparent advantages of light weight, low profile, low cost, planar configuration, easy of conformal, superior portability, suitable for array with the ease of fabrication and integration with microwave monolithic integrate circuits (MMICs). Microstrip patch antenna in its simplest design is shown in Figure 1. It consists of a radiating patch on one side of dielectric substrate ($\epsilon_r \leq 10$), with a ground plane on other side.




Figure 1: Microstrip antenna configuration

A microstrip patch antenna (MPA) consists of a conducting patch of any non-planar or planar geometry on one side of a dielectric substrate and a ground plane on other side. It is a printed resonant antenna for narrow-band microwave wireless links requiring semi-hemispherical coverage. Due to its planar configuration and ease of integration with microstrip technology, the microstrip patch antenna has been deeply. The rectangular and circular patches are the basic and most commonly used microstrip antennas.

Microstrip patch antennas can be fed by a variety of methods. The methods can be classified into two categories contacting and non-contacting. In the contacting method, the RF power is fed directly to the radiating patch using a connecting element such as a microstrip line. In the non contacting scheme, electromagnetic field coupling is done to transfer power between the microstrip line and the radiating patch.

Defected ground structure (DGS) has similar microwave circuit properties as EBG, it can also modify guided wave properties to provide a band-pass or band-stop like filter and can easily define the unit element. The geometry of DGS can be one or few etched structure which is simpler and does not need a large area to implement it [7]. DGS structure disturbs the shield current distribution in the ground plane [8], [9], which influences the input impedance and current flow of the antenna.

In today's environment, technology demands antennas which can operate on different wireless bands and should have different features like low cost, minimal weight, low profile and are

capable of maintaining high performance over a large spectrum of frequencies. In next generation networks require high data rate and size of devices are getting smaller day by day. In this evolution three important standards are 4G LTE, WiFi (WLAN) and WiMAX. Wireless local area network (WLAN) and WiMAX technology is most rapidly growing area in the modern wireless communication.

In this paper present, a microstrip patch antenna with L shaped slot meandered on patch and Defected Ground Structure used in ground plane is proposed which can be operated at single band. The designed antenna resonates at 9.32GHz, which is suitable for wireless communication applications. The antenna design is simulated using the CST simulator. In section 2, the proposed antenna geometry is presented and in Section 3 the results are presented. The final conclusion of the paper is given in Section 4.

II. ANTENNA DESIGN

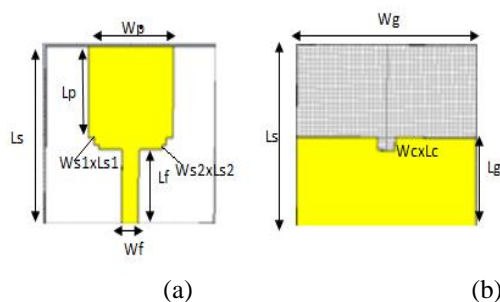


Figure 2 Geometry of the proposed antenna without filter: (a) Top view, (b) Side view.

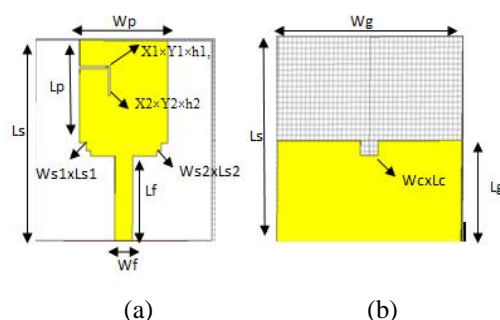


Figure 3 Geometry of the proposed antenna with filter: (a) Top view, (b) Side view.

The proposed antennas are designed on FR4 substrate with thickness (hs) of 1.6mm having relative permittivity (ϵ_r) of 4.4. The patch has the dimensions of 19.5×20 mm with height (hp) of 0.1 mm. The ground has the dimensions of $20 \text{ mm} \times 19 \text{ mm}$ with height (hg) of 0.1 mm. Antenna is excited with microstrip feed having characteristics impedance of 50Ω . The feed has dimension of

$16 \text{ mm} \times 4 \text{ mm}$ with height (hf) of 0.1 mm. The complete geometry of simple MPA is shown in Figure 2. In order to improve the Bandwidth and Return loss, ground is defected with square-Shape slot. The dimension of slot along Y-axis is $3.5 \times 5.5 \times 11.3 \text{ mm}$ and the dimension of slot along X-axis is $6.5 \times 5.5 \times 5 \text{ mm}$ as shown in Figure 3. Also this slot made on ground helps in the reduction of overall weight and size of proposed antenna. The Proposed antenna resonates at frequency (f_r) of 9.32GHz. The resonant frequency, also called the center frequency, is selected as the one at which the return loss is minimum. For the designing of rectangular microstrip patch antenna, the following relationships are used to calculate the dimensions of the rectangular microstrip patch antenna. The width of the patch is calculated using the following equation (1)

$$W = \frac{c}{2f_r} \sqrt{\frac{2}{\epsilon_r + 1}}$$

Where, W = Width of the patch C= Speed of light
 ϵ_r = value of the dielectric substrate

The effective refractive index value of a patch is an important parameter in the designing procedure of a microstrip patch antenna. The radiations traveling from the patch towards the ground pass through air and some through the substrate (called as fringing). Both the air and the substrates have different dielectric values, therefore in order to account this we find the value of effective dielectric constant. The value of the effective dielectric constant (ϵ_{reff}) is calculated using the following equation (1)

$$\epsilon_{\text{reff}} = \left(\frac{\epsilon_r + 1}{2} \right) + \left(\frac{\epsilon_r - 1}{2} \right) \left[1 + 12 \frac{h}{W} \right]^{-\frac{1}{2}}$$

Due to fringing, electrically the size of the antenna is increased by an amount of (ΔL). Therefore, the actual increase in length (ΔL) of the patch is to be calculated using the following equation(1).

$$\Delta L = 0.412h \left[\frac{(\epsilon_{\text{reff}} + 0.3) \left(\frac{W}{h} + 0.264 \right)}{(\epsilon_{\text{reff}} - 0.258) \left(\frac{W}{h} + 0.8 \right)} \right]$$

Where h= height of the substrate

The length (L) of the patch is now to be calculated using the below mentioned equation(1).

$$\lambda_g = \frac{c}{f\sqrt{\epsilon_{\text{reff}}}}$$

$$L = \frac{\lambda_g}{2} - 2\Delta L$$

Now the dimensions of a patch are known. The length and width of a substrate is equal to that of the ground plane. The length of a ground plane (L_g) and the width of a ground plane (W_g) are calculated using the following equations (1).

$$L_g = 6h + L$$

$$W_g = 6h + W$$

Table 1 shows some common design parameters or specifications for both antennas i.e. simple MPA and L shaped slot on patch antenna.

Table 1 Common design specifications of both antennas

Sl. No	Parameters	Dimensions are in mm/values
1	Ground ($L_g \times W_g \times W_{g1} \times W_{g2} \times h_g$)	$20 \times 19 \times 1 \times 1 \times 0.1$
2	Substrate ($L_s \times W_s \times h_s$)	$38 \times 40 \times 1.6$
3	Patch ($L_p \times W_p \times h_p$)	$19.5 \times 20 \times 0.1$
4	Feed ($L_f \times W_f \times h_f$)	$16 \times 4 \times 0.1$
5	Permittivity of substrate material FR4	4.4
6	Step 1 ($W_{s1} \times L_{s1}$)	1.5×1.5
7	Step 2 ($W_{s2} \times L_{s2}$)	1×1
8	Slot on patch ($X1 \times Y1 \times h1 \times t1$, $X2 \times Y2 \times h2 \times t2$)	$6.5 \times 5.5 \times 5 \times 0.4, 3.5 \times 5.5 \times 11.3 \times 0.2$
9	Slot on ground plane ($W_c \times L_c$)	3.8×2.7

III. RESULTS

The proposed modified rectangular shaped microstrip patch antenna is designed using a CST Microwave studio suit 2015 which works on principle of FIT (Finite Integration Technique). The simulation results of the return loss of both the antennas are compared in Figure 8. From the figure we can conclude that the microstrip patch has S11 values of -26.23 dB at the resonant frequency 9.312 GHz and -31.23 dB at the resonant frequency 9.256 GHz. Hence, the proposed patch antenna is better in all the aspects compared to the normal square shaped antenna. The radiation patterns of the modified rectangular shaped microstrip patch antenna are shown in Figure 12 and Figure 13 for the resonant frequencies 9.312 GHz and 9.256 GHz respectively. The VSWR of the proposed antenna is presented in the Figure 6 and 7. The plot gives

the satisfactory results of VSWR at the resonant frequency. The VSWR value is observed as =1 providing improved matching conditions.

Return loss (S11) and bandwidth

It is evident from Figure 4 that when L shaped slot introduced on patch, the proposed antenna resonates at resonant frequency $f_r = 9.256$ GHz. A very good return loss of -31.23 dB at $f_r = 9.256$ GHz is obtained for this structure. At this resonant frequency, it gives a maximum bandwidth of 1.8638 GHz. While the Figure 5 depicts that MPA without slotting on patch also resonates at resonant frequency $f_r = 9.312$ GHz. The bandwidth of the microstrip patch antenna with same dimensions as mentioned above but without slotting is 1.6822 GHz at $f_r = 9.312$ GHz. The value of return loss (S11) obtained from MPA is -26.23 dB.

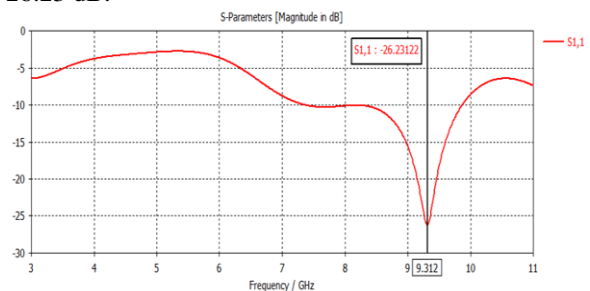


Figure 4: Return loss (S11) of microstrip patch antenna without slot

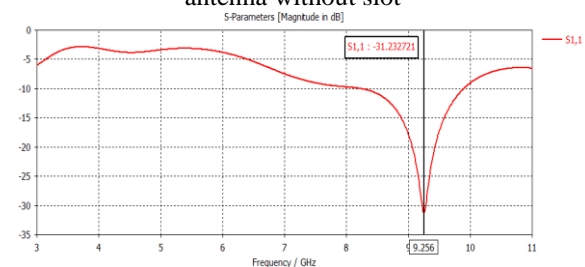


Figure 5: Return loss (S11) of microstrip patch antenna with slot

VSWR

Figure 6 shows VSWR plot of the proposed antenna. At frequency of 9.256 GHz, the VSWR is 1.056. As the value of VSWR is approximately equal to 1 at resonant frequency (f_r), proposed antenna results in perfect impedance matching. While the VSWR, in case of simple MPA i.e. without L shaped slot on patch at resonating frequency $f_r = 9.312$ GHz is 1.1026 as shown in Figure 7.

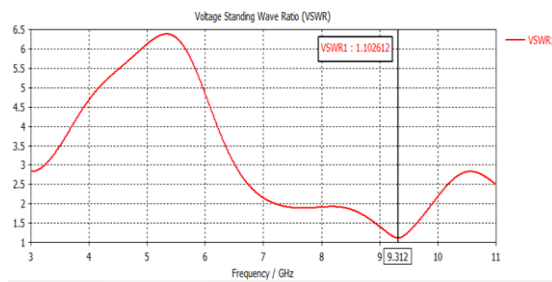


Figure 6: VSWR Plot of MPA

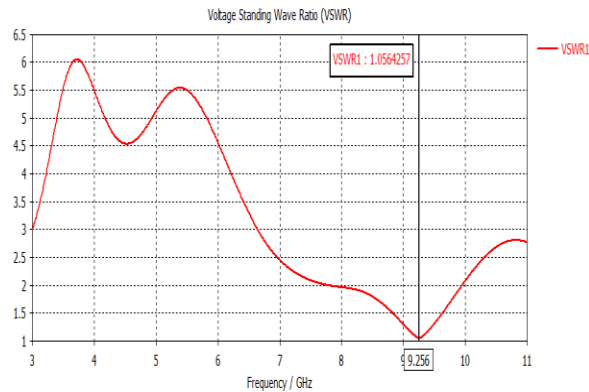


Figure 7: VSWR Plot of MPA

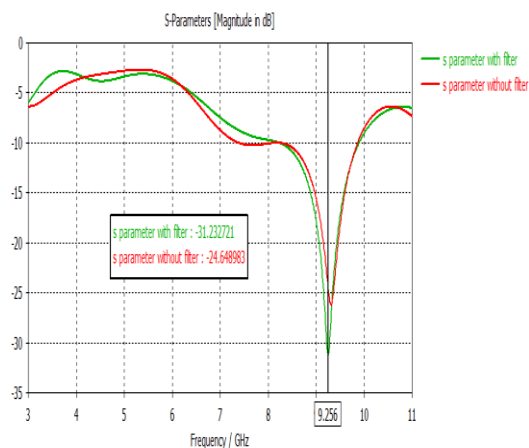


Figure 8 the compared return loss of both the antennas

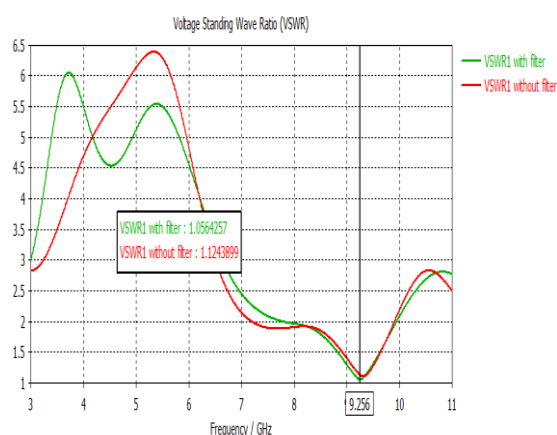


Figure 9 the compared VSWR of both the antennas

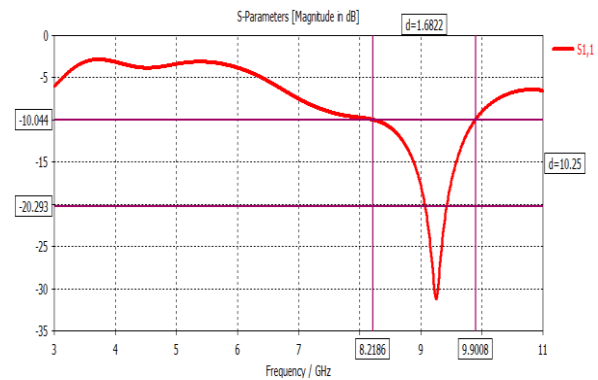


Figure 10 Bandwidth at resonant freq 9.312 GHz

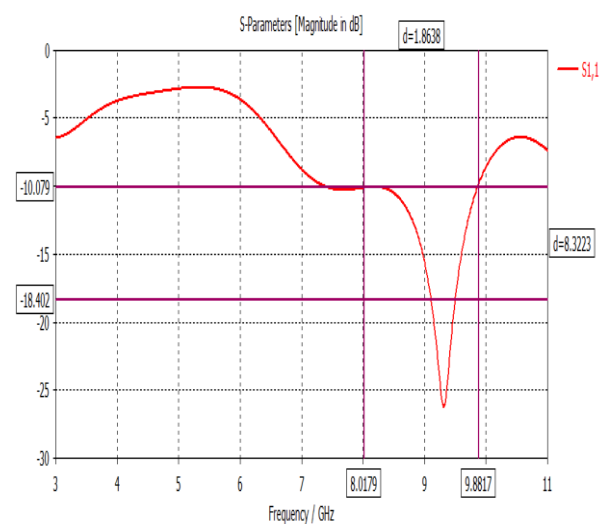


Figure 11 Bandwidth at resonant freq 9.256 GHz

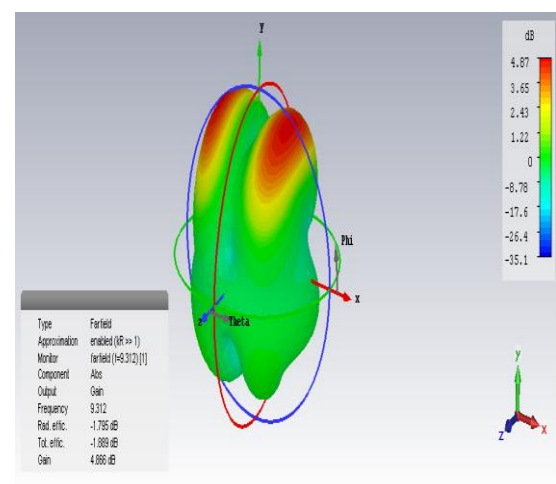


Figure 12 3D Radiation Pattern of Patch antenna showing Gain at 9.312 GH

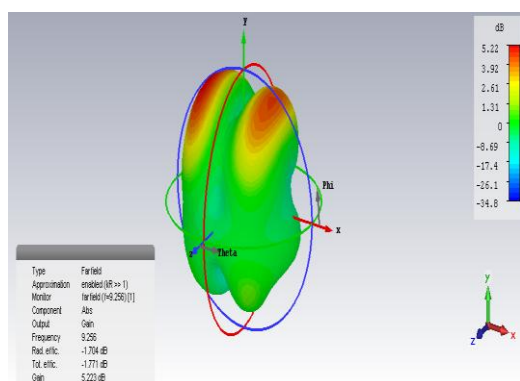


Figure 13 3D Radiation Pattern of Patch antenna showing Gain at 9.256 GHz

Table 2 summarizes the obtained simulation features of the designed antennas.

Table 2 Comparison of simulated results of both antennas

Sl.No	Parameters	MPA Antenna without slot	L Shaped Slot Antenna
1	Resonating Frequency (GHz)	9.312GHz	9.256GHz
2	Bandwidth (GHz)	1.6822GHz	1.8638GHz
3	Return Loss (dB)	-26.23dB	-31.23dB
4	VSWR	1.10	1.0
5	Gain	4.87dB	5.22dB

III. CONCLUSION

In this paper modified rectangular microstrip patch antenna with DGS is proposed which can be used for MIMO array. MIMO array demands for higher bandwidth & improved return loss characteristics. The proposed antenna resonate at 9.256 GHz with slot and without slot resonate at 9.312 GHz and bandwidth of proposed antenna without slotting is 1.6822GHz at fr 9.312 GHz with return losses ($S_{11} = -26.23\text{dB}$) as shown in Fig. 4. While microstrip patch antenna with L-Shape slot with DGS provides bandwidth of 1.8638GHz at fr 9.256GHz and return losses reaches up to -31.23dB as shown in Fig. 3. Thus it has been concluded that with L-Shape slot on patch the bandwidth of the microstrip patch antenna is increased by 181MHz. The proposed antenna

design is useful wireless communications employing MIMO techniques.

REFERENCES

- [1]. C. A. Balanis "Antenna Theory, Analysis and Design" John Wiley & Sons, Inc, New York 1997.
- [2]. P. Tilanthe1, P. C. Sharma, and T. K. Bandopadhyay "A Monopole Microstrip Antenna With Enhanced Dual Band Rejection for UWB Applications" Progress In Electromagnetic Research B, Vol. 38, 315{331, 2012
- [3]. Navya Nanda, Monika Aggarwal "Analysis and Design of Microstrip Patch Antenna with Defected Ground Structure". International Journal of Engineering Research & Technology (IJERT), Vol. 3 Issue 6, June - 2014
- [4]. Atser A. Roy, Joseph M. Môm, Gabriel A. Igwe "Enhancing the Bandwidth of a Microstrip Patch Antenna using Slots Shaped Patch" American Journal of Engineering Research (AJER) e-ISSN : 2320-0847 p-ISSN : 2320-0936 Volume-02, Issue-09, pp-23-30, 2013.
- [6]. Rushabh Ppatel and Sanyog Rawat "Bandwidth Improvement Using Four Slots In Octagonal Microstrip patch Antenna", Proc. of the international conference on advance in electronics, Electrical and computer science engineering ,EEC-2012
- [8]. Mr. Pokharkar Sagar Babanrao, Mr. Bhosale Sudhir P, Mr. Kazi Aslam Y " Enhancement of Return Loss & Efficiency of Microstrip Slotted Patch Antenna Using Line Shape Defected Ground Structure" International Journal on Recent and Innovation Trends in Computing and Communication Volume: 2 Issue: 2 ISSN: 2321-8169, 2014.
- [9]. Jigar M. Patel, Shobhit K. Patel and Falgun N. Thakkar "Defected Ground Structure Multiband Microstrip Patch Antenna using Complementary Split Ring Resonator" International Journal of Emerging Trends in Electrical and Electronics (IJETEE – ISSN: 2320-9569) Vol. 3, Issue.2 ,May-2013.
- [10]. Ayman A. R. Saad, Elsayed E. M. Khaled, and Deena A Salem "Wideband Slotted Planar Antenna with Defected Ground Structure" PIERS Proceedings, Suzhou, China September 12-16, 2011.

- [11]. Rajasree Hazra, Chandan Kumar Ghosh and S.K. Parui “Mutual coupling reduction between Closely spaced Microstrip patch elements using DGS” *Journal of Academia and Industrial Research (JAIR)* Volume Issue 2 July 2013.
- [12]. A.A. Asaker, R.S. Ghoname, A.A. Zekry, “Design of a Planar MIMO Antenna for LTE- Advanced” *International Journal of Computer Applications* (0975 – 8887) Volume No. 12, April 2015

NAGARAJ HANCHINAMANI “A MODIFIED RECTANGULAR L SHAPED SLOT WITH DGS MICROSTRIP PATCH ANTENNA FOR MIMO APPLICATION ”*International Journal of Engineering Research and Applications (IJERA)* , vol. 8, no. 2, 2018, pp. 50-55