

Muffler Design for Automotive Exhaust Noise Attenuation - A Review

Mr. Jigar H. Chaudhri, Prof. Bharat S. Patel, Prof. Satis A. Shah

1PG Student, 2Asso.Prof, 3Asso.Prof

Mechanical Engineering department, BVM Engineering college, Vallabh Vidhyanagar, Anand, Gujarat, India

ABSTRACT

In these review paper different types of mufflers and design of exhaust system belonging engine has been studied. The object of this study is decide muffler design which one reduces a large amount of noise level and back pressure of engine. In designing, there is different parameter which has to taken in to the consideration. These parameters affect the muffler efficiency.

I. INTRODUCTION

Internal combustion engines are generating the acoustic pulse by the Combustion process. This noise is controlled through the use of silencers and mufflers. A silencer has been the traditional name for noise attenuation devices, while a muffler is smaller, mass-produced device designed to reduce engine exhaust noise. Continuous development has been made in improving performance of the silencers used for automotive exhaust systems. Exhaust mufflers are widely employed to muffle the noise of an engine body or the noise of other predominant sources in vehicles. In order to maintain a desired noise and comfortable ride, the modes of a muffler need to be analyzed.

II. BASIC REQUIREMENT OF MUFFLER DESIGN

1. GENERAL REQUIREMENTS

Quiet
Simple maintenance
Performance
Compact design
Light weight

2. SPECIFIC REQUIREMENT

Reduce the sound emissions
Replaceable
Doesn't increase backpressure
Easy mounting
Within the budget
Easy manufacturing

III. DESIGN PROCEDURES OF MUFFLER

The conventional muffler is an enclosed metal tube packed with sound deadening material. An exhaust muffler is an acoustic filter except that waves are convected downstream by the moving medium. Inside a muffler, it contains a deceptively simple set of

tubes with some holes in them. These tubes and chambers are actually designed to reflect the sound waves Produced by the engine in such a way that partially cancels them out. Most conventional mufflers are rounded or oval-shaped with an inlet and outlet pipe. Some mufflers contain partitions to help reduce noise. Muffler design is traditionally a trial and error process. fig 1 shows the muffler inner structure.

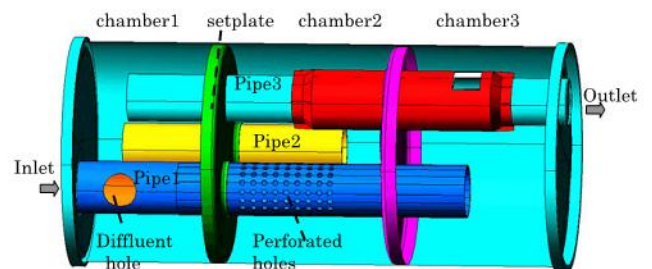


Figure 1

1. DESIGN PARAMETERS

Number of chambers
Number of inlets and outlet pipes
Diameter of Inlet and outlet pipe
Holes on the pipe
Size of muffler

IV. DIFFERENT TYPES OF MUFFLER

1. Reactive muffler

In this type of muffler Inlet and outlet tube are extended in chambers. Reactive mufflers generally consist of several pipe segments that interconnect with a number of larger chambers. The noise reduction mechanism of reactive silencer is that the area discontinuity provides an impedance mismatch for the sound wave travelling along the pipe. This impedance mismatch results in a reflection of part of the sound wave back toward the source or back and forth among the chambers. The reflective effect of the silencer chambers and piping (typically referred to as

resonators) essentially prevents some sound wave elements from being transmitted past the silencer. The reactive silencers are more effective at lower frequencies than at high frequencies, and are most widely used to attenuate the exhaust noise of internal combustion engines.

2. Absorptive muffler

This type of muffler design uses only absorption of the sound wave to reduce the noise level without messing with the exhaust gas pressure. It is known as glass pack muffler and it reduces backpressure but producing higher noise. The sound produced by this type of muffler is much higher compared to the other type of mufflers.

3. Combination muffler/silencer

Some silencers combine both reactive and absorptive elements to extend the noise attenuation performance over a broader noise spectrum. Combination silencers are also widely used to reduce engine exhaust noise

4. Heat recovery muffler/silencer

Typical applications of heat recovery silencers for internal combustion engines include hot water heating, steam generation, heat transfer fluid heating

5. Active silencer

Active silencing or sound cancellation systems, employs detectors used in sensing the noise in an exhaust pipe and a loudspeaker that is used to reintroduce an inverted signal have been developed to reduce low frequency noise.

V. MUFFLER SELECTION

- Determine the exhaust flow and acceptable exhaust system backpressure of engine.
- A free-flowing air intake and exhaust system in vehicle.
- Muffler must be built tough to handle high pressure exhaust gasses, absorb impact from road debris, and resist corrosion.
- Number of inlets, single or dual system.
- Diameter of pipe, Inlet and outlet.
- Size of the muffler.
- Material used, stainless steel muffler offers superior corrosion resistance, durability, and life span than the aluminized steel muffler.

VI. RESEARCH REVIEWS

In 2005, A.K.M.Mohumuddin presents experimental study of noise and back pressure for silencer design characteristics. The main objective of this study was to find the relationship between the back

pressure and the noise level. He concludes that the relationship between the noise and the back pressure is inversely proportional [1]. In 2010, Chndreshkumar Bhat et al. have study on design and analysis of expansion chamber mufflers. In that study, they used model analysis followed by acoustic analysis using finite element analysis technique for three different configurations of mufflers under different fixing conditions. He was found that three chamber muffler provides higher attenuation of sound pressure compare to one and two chamber mufflers. And fixing the muffler at the centre enhances sound pressure attenuation. He concludes that the transmission loss is minimum at resonance. The transmission loss increases with the increase in number of chambers and loss is uniform [2]. In 2010, Wang jie et al. have study on the model analysis of an automobile exhaust muffler based on PRO/E and ANSYS in order to improve design efficiency. The solid model is created by PRO/E and model analysis is created out by ANSYS to study the vibration of the muffler, so as to distinguish working frequency from natural frequency and avoid resonating. Data exchange between PRO/E and ANSYS using IGES (Elementary graphics exchange specification) format for data exchange specification. Muffler natural frequencies modal shapes have been calculated by the FEM analysis software named ANSYS. So the muffler vibration can be intuitive analyzed. The natural frequencies and mode shape are considered during the design of the muffler, so avoid the resonance occurred in exhaust system [3]. In 2010, Mehmet Avcu et al. introduce diesel engine exhaust system design with help of the three-dimensional model of the system has been constructed by using "ANSYS Workbench", the mathematical models via Finite Element Method (FEM) have been done via "ANSYS ICEM CFD" and, the Computational Fluid Dynamics (CFD) analyses covering back pressure and thermal analyses have been performed by using "ANSYS CFX 12" program. He Conclude, The dimensions and internal structure of the dry and wet-type silencers which are the main components of the exhaust system and the physical properties of the insulation material have been determined based on acoustic, back pressure and thermal analyses and, the layout of the diesel engine in the engine room. From the results of the back pressure analyses, it is seen that the total back pressure in the whole exhaust system is within the limits of the given diesel engine criteria and, the board outlet temperature of the exhaust system is substantially low[4]. In 2011, Ying Li Shao et al. have a study on a Exhaust Muffler Using a Mixture of Counter phase Counteract and Split-gas Rushing. In order to solve the problems of traditional exhaust silencers with poor characteristics of noise reduction in low-frequency range and high exhaust resistance, a new theory of exhaust silencer of

diesel engine based on counter-phase counteract and split-gas rushing has been proposed. In single-cylinder diesel engine CG25 as the experimental engine. He measured the exhaust noise and its spectra. By comparing the results of the new types of mufflers to those without a muffler and those with the original muffler of the engine. He conducted on this noise experiment that the CG25 single cylinder diesel engine shows new muffler's good insertion loss characteristic in the wide range of engine speed comparable to the original passive muffler especially in the range of 500 Hz. The original muffler can only reduce the high-frequency noise components, it cannot reduce, even strengthen the noise of frequency below 500 Hz, proved conventional muffler with poor capacity of lowering the low-frequency noise again. The new exhaust mufflers were obviously effective in controlling the low-frequency exhaust noise, which proved correctness of the new theory not only proved that the new mufflers have very good performance for low-frequency noise reduction, but also proved that using split-gas rushing can lower the air flow speed thus lowering the air regeneration noise. fig 2 shows the new design of muffler [5].

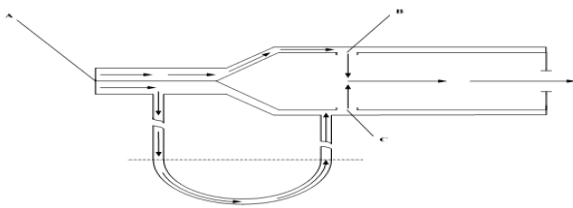


Figure 2

In 2011, Shi Wu et al. have study on Structural Design and Testing Study of Truck Muffler. He introduces the performance evaluation method of automobile's exhaust muffler and it's the size parameter to the noise elimination effect influence. It presents a two chambers impedance compound exhaust muffler designment's method based on a boundary element method, which focuses on the truck's diesel engine. Test shows that the truck exhaust muffler has a good effect with insertion loss of 22.7dB, and by the boundary element method, calculates transmission loss under the static condition. By the experiment he conclude that By laying cotton blankets absorbing sound on the inner surface of the truck muffler, not only can we solve the exhaust noise of the mid and high frequency band, and isolate the exhaust heat out of the radiation. By blocking imports of gas to prevent gas through, the muffler avoids the high frequency noise transmission to meet the technical requirements [6]. In 2011, Jun Chan investigates CFD Numerical Simulation of Exhaust Muffler based on the physical numerical modelling of the flow field of the muffler in this paper, the author simulated the field by numerical method with Fluent and analyzed the effect which the

internal flow field has on the performance of the muffler. The author simulated the field by numerical method with Fluent and analyzed the effect which the internal flow field has on the performance of the muffler[7]. In 2012, M RAJASHKUMAR REEDDY explain design and optimization of exhaust muffler in automobiles by study of Muffler dimensions are measured through the Benchmarking, to create CAD models. The CAD models are created in CATIA V5 R19, later these CAD models of muffler are exported to HYPER MESH for pre-processing work. Free analysis is carried out on this muffler by FEA Method using NASTRAN Software. In order to determine the resonance frequencies, were then compiled to determine which peaks were the most significant for the system. From the data, side baffles were selected as weak parts of the muffler. In order to minimize the effects of these resonance frequencies, the suggested design improvement is to add thickness and also add damping to the system [8]. In 2012, Hua HUANGE et al. have study Multi-objectives Optimization on Exhaust Muffler Based on DoE. He builds comprehensive evaluation system and DoE development flows are built. RBF mathematical models of evaluated objectives are established to look for Pareto optimal solutions. he define design parameters (diameter of inlet and outlet pipe, position of Clapboard 1 and Clapboard 2, open hole rate of Clapboard 1 and Clapboard 2, length of inlet pipe in the second cavity, and length of middle pipe in the third cavity). Define optimized objectives, Building comprehensive evaluation system for Muffler, he use 2k factor analysis is the first step of DoE optimization, Build mathematical model. This paper builds muffler DoE development flow, and does multi-objectives research. Based on DoE way, it builds RBF mathematical model of each objective, and gets 300 Pareto optimal solutions (based on equable change of weight of optimized objectives) from RBF model by using NSEA+ arithmetic[9]. In 2013, Ehsan Sabah M. AL-Ameen et al. do Experimental Test for Noise Attenuation in Gasoline Engine with Different Types of Mufflers. Compares between three different types of an exhaust muffler for noise attenuation of single cylinder four stroke air-cooled gasoline engine. A set of conclusions achieved about the effect of the mufflers chamber's expansion ratio, chambers length, and wall thickness. Sound attenuation of 12.5, 15 and 16 dB A is achieved with, Multi-chamber Reactive Muffler, Concentric-tube Resonator Muffler and Combined Reactive and Dissipative Muffler[10]. In 2013, Takashi Yasuda Studies on an automobile muffler with the acoustic characteristic of low-pass filter and Helmholtz resonator. Based on the typical structure, a muffler with an interconnecting hole on the tail pipe was proposed to improve its acoustic performance. Acoustic performances of the proposed

muffler were studied experimentally and theoretically in frequency and time domain. Results showed that the specimen muffler had attenuation performances of low-pass filter and Helmholtz resonator when an interconnecting hole was designed on the tailpipe [11].

VII. CONCLUSION

Different types of muffler and designing methods are studied. After studying this methods and procedures for designing a muffler, we conclude that combination type of muffler is more efficient than reactive and absorptive mufflers. New theory for designing muffler by counter-phase counteracts split-gas rushing and methods of designing Active silencer are also preferable for new research work.

REFERENCES

- [1] 2005, A.K.M. Mohumuddin, Mohd Rashidin Ideres and Shukari Mohad Hashim, "Experimental study of noise and back pressure for silencer design characteristics", *Journal of Applied Science*5(7):1292-1298,2005 ISSN 1812-5654.
- [2] 2010, Chandrashekhar Bhat, S S Sharma, Jagannath K, N S Mohan, Sathisha S G, "Design and Analysis of a Expansion Chamber Mufflers". *World Journal Of Engineering*, volume 7, supplement 3, 2010, ISSN: 1708-5284.
- [3] 2010, Wang jie and Dong-peng Vue. *The Modal Analysis of Automotive Exhaust Muffler Based on PROIE and ANSYS*. 2010 3rd International Conference on Advanced Computer Theory and Engineering (ICACTE). 2010 IEEE
- [4] 2010, Mehmet Avcu, Şadi Kopuz and Mehmet Teke." DIESEL ENGINE EXHAUST SYSTEM DESIGN " *Journal of Naval Science and Engineering* 2010, Vol. 6, No.1, pp. 39-58.
- [5] 2011, Ying Li Shao. *A Study on Exhaust Muffler Using a Mixture of Counter phase Counteract and Split-gas Rushing*. © 2011 Published by Elsevier Ltd. Selection and/or peer-review under responsibility of [CEIS 2011]
- [6] 2011, Shi wu, Dongkai Jia, Yuntong Jia, Ke Wu. *Structural Design and Testing Study of Truck Muffler*. 2011 International Conference on Electronic &Mechanical Engineering and Information Technology ©2011 IE
- [7] 2011, Jun Chan and Xiong Shi*. *CFD Numerical Simulation of Exhaust Muffler*. 2011 Seventh International Conference on Computational Intelligence and Security. © 2011 IEEE. DOI 10.1109/CIS.2011.321.
- [8] 2012, 1M RAJASEKHAR REDDY & 2 K .MADHAVA REDDY. *DESIGN AND OPTIMIZATION OF EXHAUST MUFFLER IN AUTOMOBILES* *International Journal of Automobile Engineering Research and Development (IJAuERD)*ISSN 2277-4785 Vol.2, Issue 2 Sep 2012 11-21
- [9] 2012, Hua HUANGEJimin NI, Qianying DU, Nan XIE, *Multi-objectives Optimization on Exhaust Muffler Based on DoE*. 2012 Fourth International Conference on Computational and Information Sciences.©2012 IEEE DOI 10.1109/ICCIS.2012.189.
- [10] 2013, Ehsan Sabah M. AL-Ameen. *Experimental Test for Noise Attenuation in Gasoline Engine with Different Types of Mufflers* *Journal of Engineering and Development*, Vol. 16, No.4, Dec. 2012 ISSN 1813- 7822
- [11] 2013, Takashi Yasud , Chaoqun Wu, Noritoshi Nakagawa , Kazuteru Nagamura . *Studies on an automobile muffler with the acoustic characteristic of low-pass filter and Helmholtz resonator*. *Applied Acoustics* 74 (2013) 49–57. 2012 Elsevier Ltd.<http://dx.doi.org/10.1016/j.apacoust.2012.06.007>