

## Experimental Study and Optimisation of Mrr In CNC Plasma ARC Cutting

Gurwinder Singh\*, Shalom Akhai\*\*

\*(Faculty, SDDIET College of Engineering & Technology, Panchkula.)

\*\* (Faculty, PEC University of Technology, Chandigarh.)

### ABSTRACT

The research and development in the precise and accurate machining technology of hard metals (Ferrous, non-ferrous and glass etc) is gaining much importance in the industry since last many years. Due to the tremendous competition and cost factor, the non-conventional machining technology is becoming the first choice of the engineers and technicians. In this era of advanced technological processes the CNC plasma arc machining is gaining tremendous ground in the industry. It is much more capable of producing best finished, high accurate machining of very complicated non-symmetrical profile in no time. The main objective and targets of this practical experiment is based to achieve the best possible setting and parameters of operation on a CNC plasma arc machine to achieving speedy work i.e. Maximum material removal rate.

**Keywords** - CNC, Plasma Arc, MRR, Kerfs, Cutting Speed, Standoff Distance.

### I. INTRODUCTION

Plasma arc cutting (PAC) is a non-conventional machining process. This is most suitable for machining quite a number of metals like Mild steel, stainless steel, titanium alloy and cast iron can be processed. This technique is also employed for machining, field steel as well as non ferrous metals and alloys i.e. Copper, Aluminum, Tin, magnesium and there alloys. Plasma arc machining or plasma arc cutting is a process that is used to cut precision profiles patterns, sheets of different by the help of a plasma torch or Plasma gun.



Figure 1.1 Plasma arc cutting machine.

An inert gas as a mixture is blown through a nozzle at a very high speed along with an electric arc

formed between the electrode and workpiece. A very high temperature is produced by the arc which is used to cut the metal by melting it and by removing away the molten metal efficiently by gas pressure. This Process is also used for plasma arc cutting, machining, welding and some other specialized applications.

### II. OBJECTIVE

The main purpose of this experimental work was to study the plasma arc cutting parameters in smooth cutting using straight polarity process. The objectives of this work are listed below:

1. To study about the influence of Plasma Arc Cutting Parameters on Mild Steel material.
2. To design a series of experiments with the help of Design of Experiments (DOE) technique layout in order to study Plasma Arc Cutting (PAC).
3. To derive the best combination of solution for maximizing the Material Removal Rate (MRR) with Taguchi Method.

### III. EXPERIMENTATION

In this work of plasma machining, the plasma is usually initiated by a high voltage pulse which creates a conductive path for a continuous electric arc to form between the hot tungsten cathode and anode. The working gas flows around the tungsten cathode and through a constricting tube or nozzle. The temperature, in the narrow orifice around the cathode, reaches 28,000°C which is enough to produce a high-temperature plasma arc. Under these conditions, the metal being machined is very rapidly melted and vaporized. The stream of ionized gases flushes away the machining debris as a fine spray

creating flow lines on the machined surface. The removal rates by this method are substantially higher than those of conventional single-point turning operation.

The effect and optimization of process parameters for plasma arc cutting on 10mm mild steel plate. Three process parameters viz. Kerfs, cutting speed and standoff distance are considered and experiments are conducted based on L<sub>9</sub> orthogonal array. Process response material removal rate Parameters of the machined surface are measured for every experimental runs. For maximum material removal rate Characteristics process parameters are optimized based on Taguchi method. Analysis of variation (ANOVA) is performed to get the contribution of each process parameter on the performance characteristics and it observed that cutting speed is significant process parameter that affects the response i.e. material removal rate.

#### IV. RESULTS & DISCUSSION


Experimental design strategy, using Taguchi orthogonal arrays concept as used. The following L<sub>9</sub> orthogonal array was applied.

**Table 1.1** L-9 Orthogonal array with actual values

Mass 1 (Before Cutting)	Mass 2 (After Cutting)	Mass Loss (g)	Time Taken (Sec)	MRR (g/Sec)
783	161.5	621.5	10	62.15
786	160.7	625.3	09	69.48
770	159.0	611	08	76.38
793	160.7	632.3	10	63.23
789	159.3	629.7	09	69.97
770	158.9	611.1	08	76.39
798	159.4	638.6	10	63.86
788	158.7	629.3	09	69.93
775	157.8	617.2	08	77.15

#### Observations in Taguchi Analysis: MRR versus kerfs, cutting speed, stand of distance

The SN ratio graph figure1.2 was made using 3 variables i.e. kerfs, cutting speed and standoff distance. As observed from graph, it is clear that at 2.52mm of kerfs, 1600mm/min cutting speed and 7mm Standoff distance gives the best output in terms of Material removal rate will be maximize.

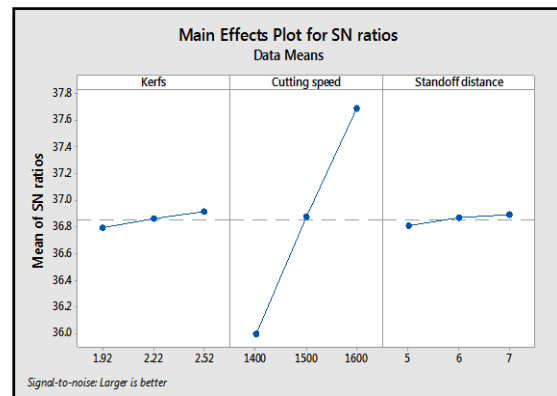

**Figure 1.2** Main effects plot for S/N Ratio (MRR)

#### ANOVA Test results for Material removal rate

**Table 1.2** General linear Model (ANOVA) for MRR

Source	DF	SS	MS	F	P	Contrib ution %
Kerfs	2	1.434	0.717	40.25	0.024	0.516
Cutting speed	2	275.81	137.90	7742.9	0.000	99.26
Stand of distance	2	0.565	0.282	15.85	0.0595	0.203
Residual Error	2	0.036	0.018			
Total	8	277.85				

From the ANOVA model for the above experimentation, the calculations are done at 95% confidence level. In an analysis of variance table, the P value determines the most significant factor. The factor whose P value is less than 0.05 will be most effective factor. The ANOVA table clearly indicates that Kerfs and Standoff distance parameter is not significant parameter for defining the MRR. Cutting speed parameter are significant, means that these terms influence the model to a great extent. Cutting speed has the greatest effect on MRR and is followed by Kerfs and Standoff distance.

#### General Regression equation for MRR versus Kerfs, Cutting speed and Standoff distance

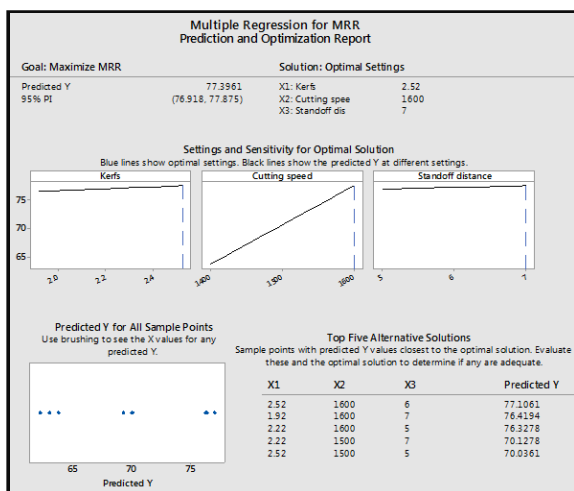


Figure 1.3 Multiple Regressions for MRR (Prediction and optimization report)

The above figure 1.3 indicate that the optimal settings for maximum material Removal Rate (MRR).

The following equation has been formed with the help of software MINITAB version 17:

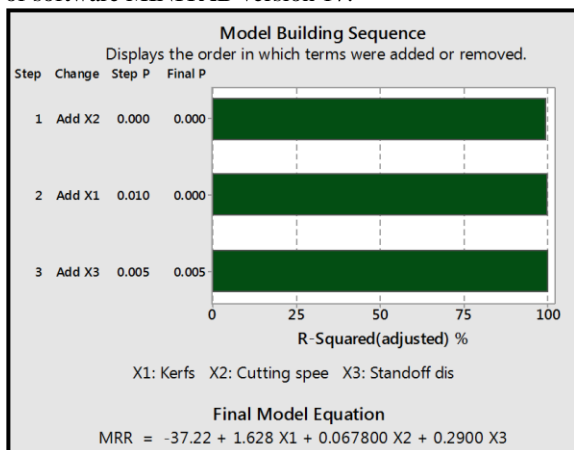


Figure 1.4: Model Equation

**Model Adequacy Check:** The P-value of Regression equation (0.050) indicates that the regression model is significant. The coefficient of determination (R<sup>2</sup>) which indicates the goodness of fit for the model so the value of R<sup>2</sup> =99.96% which indicate the high significance of the model.

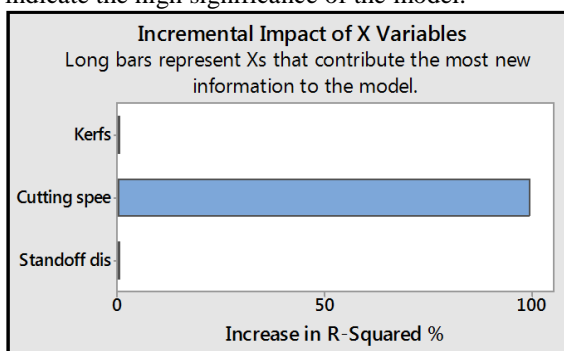


Figure 1.5: Impact of variables

### OPTIMIZED PARAMETERS COMBINATION

As Material Removal Rate is the “larger is better” type quality type characteristic, from the figure 1.2 it can be seen that the third level of kerfs(A3), third level of Cutting speed (B3) and third level of Standoff distance (C3) results in maximum value of Material Removal Rate.

Table 1.3 Optimal value of Material Removal Rate.

Sr. no.	kerfs	Cutting speed	Standoff distance	Material Removal Rate.
1	2.52	1600	7	77.40

### Contour plots for MRR

Contours along with three dimensional surfaces are shown in figure 1.6, 1.7 and 1.8 with the help of these contours the value of response can be calculated at any point in the designed region. The figure 1.6 shows the response MRR between cutting speed and kerfs. In this the other parameter Standoff distance kept constant to the higher value. Figure 1.7 shows response MRR between the Cutting speed and Standoff distance. In this the other parameter applied Kerfs constant to the higher value. Figure 1.8 shows response MRR between the Standoff distance and kerfs. In this the other parameter applied cutting speed constant to the higher value.

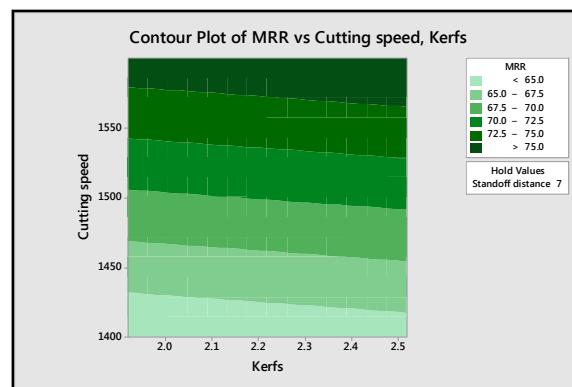


Figure 1.6 Contour plot of MRR for Cutting speed and Kerfs

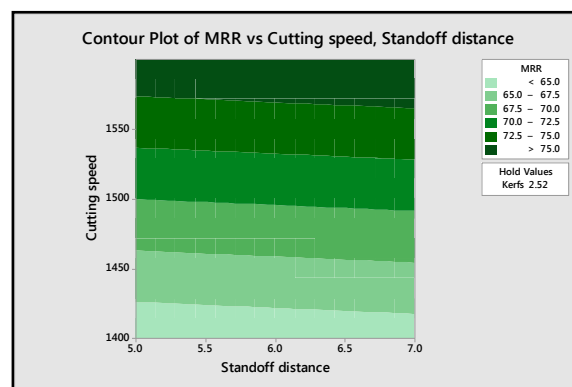


Fig 1.7 Contour plot of MRR for Cutting speed and Standoff distance

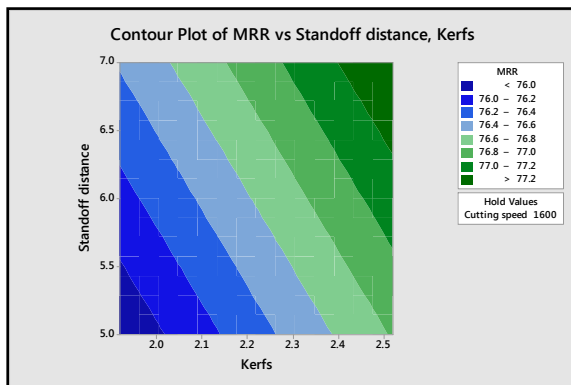


Figure 1.8 Contour plot of MRR for Standoff distance and Kerfs

## V. CONCLUSION

This paper presents the application of the Taguchi method to the optimization of the machining parameters of CNC Plasma Arc Cutting Machine. It has been shown that Material Removal Rate can be significantly improved in the CNC Plasma Arc Cutting process using the optimum level of parameters. From experimental analysis done on MILD STEEL, it was concluded that:

- [1] In CNC plasma arc machining the cutting Speed is the parameter has a significant effect whereas the other parameters viz. Kerfs and standoff distance are less effective.
- [2] The steam as the plasma gas will generate more energy than other gases for the same current value and the plasma jet generated is much narrowed when primary gas, Oxygen and secondary gas, air is used as plasma gases.
- [3] For Maximum Material removal rate the cutting speed play a very important role. Higher the value of cutting speed more is the MRR.

## REFERENCES:

- [1] Milan Kumar Das, Kaushik Kumar, Tapan Kr Barman, Prasanta Sahu ( 2014) “*Optimization of process parameters in plasma arc cutting of EN 31 steel based on MRR and multiple roughness characteristics using grey relational analysis*” *Procedia material science*, vol. 5, pp. 1550-1559.
- [2] S. Mahnaz Modirkhazeni (2014) “*Variational multi scale method for non equilibrium plasma flows Juan Pablo Trelles*” Department of Mechanical Engineering, University of Massachusetts Lowell.
- [3] Tetyana Kavka, Alan Maslani, Milan Hrabivsky, Thomas Stechre, Heribert Pauser, (2013) “*Experimental study of effect of gas nature on plasma arc cutting of mild steel*” *Journal of physics D: appl. Phys*, vol. 46.
- [4] Subbarao Chamarthia, N.Sinivasa Reddyb, Manoj Kumar Elipeyc, D.V. Ramana Reddyd (2013) “*Investigation Analysis of Plasma arc cutting Parameters on the Unevenness surface of Hardox-*

400 material” Department of Mechanical Engineering, Vardhaman college of engineering, 501218, A.P, India.

- [5] Yahya Hisman Selic (2013) “*Investigating the effect of cutting parameters on material cut in CNC plasma*” materials and manufacturing processes, vol. 28, pp. 1053 – 1060.
- [6] Bogdan Nedik, Marko Janakovik, Miroslav Radovanovik, Gordana Globocki Latic (2013) “*Quality of plasma cutting*” *kragujevac, Serbia*, vol. 15, pp. 314 – 319.
- [7] K. Salonitis, S. Vatousianos (2012) “*Experimental Investigation of the Plasma Arc Cutting Process*” *Procedia CIRP*, vol. 3, pp. 287 – 292.
- [8] John Kechagias, Michael Bills, Stergios Maropoulos (2010) “*An Optimization of the cutting parameters during CNC plasma-arc cutting of ST37 mild steel plates is attempted using robust design*”. *International Journal of Experimental design and process Optimization*. Volume.no.4 page 315-326.
- [9] R. Bini, B.M. Colosimo, A.E. Kutlu, M. Monno (2008) “*Experimental study of the features of the kerf generated by a 200A high tolerance plasma arc cutting system*” Department of Mechanical Engineering, Politecnico di Milano, Via Bonardi 9, 20133 Milano, Italy.
- [10] V. Colombo, A. Concetti, E. Ghedini, F. Rotundo (2011) “*Advances in Plasma Arc Cutting Technology: The Experimental Part of an Integrated Approach*” Published online: 21 December 2011 Springer Science Business Media,LLC.