

A Review of recent work in wire electrical discharge machining (WEDM)

Prof. Vijay D.Patel*, Dr. Rajeev V. Vaghmare**

*(Assistant Professor in Mechatronics at U.V.Patel collage of engginering ,Mehsana, Gujarat)

** (Principal, SABAR institute of technology for GIRLS, Majra, Gujarat)

Abstract

Wire electrical discharge machining (WEDM) is a specialized thermal machining process capable of accurately machining parts with varying hardness or complex shapes, which have sharp edges that are very difficult to be machined by the main stream machining processes. This practical technology of the WEDM process is based on the conventional EDM sparking phenomenon utilizing the widely accepted non-contact technique of material removal. Since the introduction of the process, WEDM has evolved from a simple means of making tools and dies to the best alternative of producing micro-scale parts with the highest degree of dimensional accuracy and surface finish quality.

This paper reviews the vast array of research work carried out from the EDM process to the development of the WEDM. It reports on the WEDM research involving the optimization of the process parameters surveying the influence of the various factors affecting the machining performance and productivity. The paper also highlights the adaptive monitoring and control of the process investigating the feasibility of the different control strategies of obtaining the optimal machining conditions. A wide range of WEDM industrial applications are reported together with the development of the hybrid machining processes. The final part of the paper discusses these developments and outlines the possible trends for future WEDM research.

Keywords: Wire electrical discharge machining (WEDM); Process optimization; Cutting rate; Material removal rate; Surface finish Electric discharge machining (EDM), Metal removal rate (MRR), Surface roughness (SR)

I. INTRODUCTION

Wire electrical discharge machining (WEDM) is a widely accepted non-traditional material removal process used to manufacture components with intricate shapes and profiles. It is considered as a unique adaptation of the conventional EDM process, which uses an electrode to initialize the sparking process. However, WEDM utilizes a continuously travelling wire electrode

made of thin copper, brass or tungsten of diameter 0.05–0.3 mm, which is capable of achieving very small Corner radii. The wire is kept in tension using a mechanical tensioning device reducing the tendency of producing inaccurate parts. During the WEDM process, the material is eroded ahead of the wire and there is no direct contact between the work piece and the wire, eliminating the mechanical stresses during machining. In addition, the WEDM process is able to machine exotic and high strength and temperature resistive (HSTR) materials and eliminate the geometrical changes occurring in the machining of heat-treated steels.

WEDM was first introduced to the manufacturing industry in the late 1960s. The development of the process was the result of seeking a technique to replace the machined electrode used in EDM. In 1974, D.H. Dule-bohn applied the optical-line follower system to automatically control the shape of the component to be machined by the WEDM process [1]. By 1975, its popularity was rapidly increasing, as the process and its capabilities were better understood by the industry [2]. It was only towards the end of the 1970s, when computer numerical control (CNC) system was initiated into WEDM that brought about a major evolution of the machining process. As a result, the broad capabilities of the WEDM process were extensively exploited for any through-hole machining owing to the wire, which has to pass through the part to be machined. The common applications of WEDM include the fabrication of the stamping and extrusion tools and dies, fixtures and gauges, prototypes, aircraft and medical parts, and grinding wheel form tools.

This paper provides a review on the various academic research areas involving the WEDM process, and is the sister paper to a review by Ho and Newman [3] on die-sinking EDM. It first presents the process overview based on the widely accepted principle of thermal conduction and highlights some of its applications. The main section of the paper focuses on the major WEDM research activities, which include the WEDM process optimization together with the WEDM process monitoring and control. The final part of the paper discusses these topics and suggests the future WEDM research direction.

2. WEDM

This section provides the basic principle of the WEDM process and the variations of the process

combining other material removal techniques.

2.1. Process

The material removal mechanism of WEDM is very similar to the conventional EDM process involving the erosion effect produced by the electrical discharges (sparks). In WEDM, material is eroded from the work-piece by a series of discrete sparks occurring between the work piece and the wire separated by a stream of dielectric fluid, which is continuously fed to the machining zone [4]. However, today's WEDM process is commonly conducted on work pieces that are totally submerged in a tank filled with dielectric fluid. Such a submerged method of WEDM promotes temperature stabilization and efficient flushing especially in cases where the work piece has varying thickness. The WEDM process makes use of electrical energy generating a channel of plasma between the cathode and anode [5], and turns it into thermal energy [6] at a temperature in the range of 8000–12,000 °C [7] or as high as 20,000 °C [8] initializing a substantial amount of heating and melting of material on the surface of each pole. When the pulsating direct current power supply occurring between 20,000 and 30,000 Hz [9] is turned off, the plasma channel breaks down. This causes a sudden reduction in the temperature allowing the circulating dielectric fluid to implore the plasma channel and flush the molten particles from the pole surfaces in the form of microscopic debris.

While the material removal mechanisms of EDM and WEDM are similar, their functional characteristics are not identical. WEDM uses a thin wire continuously feeding through the work piece by a microprocessor, which enable parts of complex shapes to be machined with exceptional high accuracy. A varying degree of taper ranging from 15° for a 100 mm thick to 30° for a 400 mm thick workpiece can also be obtained on the cut surface. The microprocessor also constantly main-tains the gap between the wire and the work piece, which varies from 0.025 to 0.05 mm [2]. WEDM eliminates the need for elaborate pre-shaped electrodes, which are commonly required in EDM to perform the roughing and finishing operations. In the case of WEDM, the wire has to make several machining passes along the profile to be machined to attain the required dimensional accuracy and surface finish (SR) quality. Kunieda and Furudate [10] tested the feasibility of con-ducting dry WEDM to improve the accuracy of the fin-ishing operations, which was conducted in a gas atmosphere without using dielectric fluid. The typical WEDM cutting rates (CRs) are 300 mm²/min for a 50 mm thick D2 tool steel and 750 mm²/min for a 150 mm thick aluminium [11], and SR quality is as fine as 0.04–0.25 IRa. In addition,

WEDM uses deionised water instead of hydrocarbon oil as the dielectric fluid and contains it within the sparking zone. The deionised water is not suitable for conventional EDM as it causes rapid electrode wear, but its low viscosity and rapid cooling rate make it ideal for WEDM [12].

3. Main areas of research

The authors have organized the various WEDM research into two major areas namely WEDM process optimization together with WEDM process monitoring and control.

3.1. Process Optimization

Today, the most effective machining strategy is determined by identifying the different factors affecting the WEDM process and seeking the different ways of obtaining the optimal machining condition and performance. This section provides a study on the numerous machining strategies involving the design of the process parameter and the modeling of the process.

3.1.1. Process parameters design

The settings for the various process parameters required in the WEDM process play a crucial role in producing an optimal machining performance. This section shows some of the analytical and statistical methods used to study the effects of the parameters on the typical WEDM performance measures such as CR, MRR and SR.

3.1.1.1 Factors affecting the performance measures.

WEDM is a complex machining process controlled by a large number of process parameters such as the pulse duration, discharge frequency and discharge current intensity. Any slight variations in the process parameters can affect the machining performance measures such as surface roughness and CR, which are two of the most significant aspects of the WEDM operation [44]. Suziki and Kishi [45] studied the reduction of discharge energy to yield a better surface roughness, while Luo [46] discovered the additional need for a high-energy efficiency to maintain a high machining rate without damaging the wire. Several authors [47] have also studied the evolution of the wire tool performance affecting the machining accuracy, costs and performance measures.

The selection of appropriate machining conditions for the WEDM process is based on the analysis relating the various process parameters to different performance measures namely the CR, MRR and SR. Traditionally; this was carried out by relying heavily on the operator's experience or conservative technological data provided by the WEDM equipment manufacturers, which produced inconsistent machining performance. Levy and Maggi [48] demonstrated that the parameter settings

given by the manufacturers are only applicable for the common steel grades. The settings for machining new materials such as advanced ceramics and MMCs have to be further optimized experimentally.

3.1.1.2. Effects of the process parameters on the cutting rate. Many different types of problem-solving quality tools have been used to investigate the significant factors and its inter-relationships with the other variables in obtaining an optimal WEDM CR. Konda et al. [49] classified the various potential factors affecting the WEDM performance measures into five major categories namely the different properties of the work piece material and dielectric fluid, machine characteristics, adjustable machining parameters, and component geometry. In addition, they applied the design of experiments (DOE) technique to study and optimize the possible effects of variables during process design and development, and validated the experimental results using noise-to-signal (S/N) ratio analysis. Tarng et al. [50] employed a neural network system with the application of a simulated annealing algorithm for solving the multi-response optimization problem. It was found that the machining parameters such as the pulse on/off duration, peak current, open circuit volt-age, servo reference voltage, electrical capacitance and table speed are the critical parameters for the estimation of the CR and SR. Huang et al. [51] argued that several published works [50,52,53] are concerned mostly with the optimization of parameters for the roughing cutting operations and proposed a practical strategy of process planning from roughing to finishing operations. The experimental results showed that the pulse on-time and the distance between the wire periphery and the work piece surface affect the CR and SR significantly. The effects of the discharge energy on the CR and SR of a MMC have also been investigated [54].

3.1.2. Process modeling

In addition, the modeling of the WEDM process by means of mathematical techniques has also been applied to effectively relate the large number of process variables to the different performance of the process. Speeding and Wang [62] developed the modeling techniques using the response surface methodology and artificial neural network technology to predict the process performance such as CR, SR and surface waviness within a reasonable large range of input factor levels. Liu and Esterling [63] proposed a solid modeling method, which can precisely represent the geometry cut by the WEDM process, whereas Hsue et al. [64] developed a model to estimate the MRR during geo-metrical cutting by considering wire deflection with transformed exponential trajectory

of the wire centre. Spur and Scho'nbeck [65] designed a theoretical model studying the influence of the workpiece material and the pulse-type properties on the WEDM of a work-piece with an anodic polarity. Han et al. [66] developed a simulation system, which accurately reproduces the discharge phenomena of WEDM. The system also applies an adaptive control, which automatically generates an optimal machining condition for high precision WEDM.

3.2. Process monitoring and control

The application of the adaptive control systems to the WEDM is vital for the monitoring and control of the process. This section investigates the advanced monitoring and control systems including the fuzzy, the wire breakage and the self-tuning adaptive control systems used in the WEDM process.

3.2.1. Fuzzy control system

The proportional controllers have traditionally been used in the servo feed control system to monitor and evaluate the gap condition during the WEDM process. However, the performance of the controllers was limited by the machining conditions, which considerably vary with the parameters settings. Kinoshita et al. [67] investigated the effects of wire feed rate, wire winding speed, wire tension and electrical parameters on the gap conditions during WEDM. As a result, many conventional control algorithms based on explicit mathematical and statistical models have been developed for EDM or WEDM operations [68–72]. Several authors [73,74] have also developed a pulse discrimination sys-tem providing a means of analyzing and monitoring the pulse trains under the various WEDM conditions quantitatively. Although these types of control systems can be applied to a wide range of machining conditions, it cannot respond to the gap condition when there is an unexpected disturbance [75].

In recent years, the fuzzy control system has been applied to WEDM process to achieve optimum and highly efficient machining. Several authors claimed that the fuzzy logic control system implements a control strategy, which captures the expert's knowledge or operator's experience in maintaining the desired machining operation [76]. In addition, the fuzzy logic controller does not require any comprehensive mathematical models adapting to the dynamic behavior of the WEDM operation [77]. Several authors [75,78] proposed the sparking frequency monitoring and adaptive control systems based on the fuzzy logic control and the adjusting strategies, which can be applied to a wide range of machining conditions. Liao and Woo [79] also designed a fuzzy controller with an online pulse monitoring system isolating the discharging noise and discriminating the ignition delay time of each

pulse. EDM pulses can be classified into open, spark, arc, off or short, which are dependent on the ignition delay time, and have a direct influence on the MRR, SR, electrode wear and accuracy of the part [80,81].

3.2.2. Wire inaccuracy adaptive control systems

The occurrence of wire breakage during WEDM is one of the most undesirable machining characteristics greatly affecting the machining accuracy and performance together with the quality of the part produced. Many attempts have made to develop an adaptive control system providing an online identification of any abnormal machining condition and a control strategy preventing the wire from breaking without compromising the various WEDM performance measures. This section reports research from a collection of published work involving the adaptive control of wire breakage, wire lag and wire vibration.

3.2.2.1. Wire breakage. A wide variety of the control strategies preventing the wire from breaking are built on the knowledge of the characteristics of wire break-age. Kinoshita et al. [82] observed the rapid rise in pulse frequency of the gap voltage, which continues for about 5–40 ms before the wire breaks. They developed a monitoring and control system that switches off the pulse generator and servo system preventing the wire from breaking but it affects the machining efficiency. Several authors [83,84] also suggested that the concentration of electrical discharges at a certain point of the wire, which causes an increase in the localized temperature resulting in the breakage of the wire. However, the adaptive control system concentrating on the detection of the sparking location and the reduction of the discharge energy was developed without making any considerations to the MRR. The breakage of the wire has also been linked to the rise in the number of short-circuit pulses lasting for more than 30 ms until the wire broke [85].

Other authors [86] argued that the wire breakage is correlated to the sudden increase in sparking frequency. It was also found that their proposed monitoring and control system based on the online analysis of the sparking frequency and the real-time regulation of the pulse off-time affects the MRR. Liao et al. [87] remedied the problem by relating the MRR to the machining parameters and using a new computer-aided pulse discrimination system based on the pulse train analysis to improve the machining speed. Whereas Yan and Liao [88,89] applied a self-learning fuzzy control strategy not only to control the sparking frequency but also to maintain a high MRR by adjusting in real time the off time pulse under a constant feed-rate machining condition.

The breaking of the wire is also due to the excessive thermal load producing unwarranted heat on the wire electrode. Most of the thermal energy generated during the WEDM process is transferred to the wire while the rest is lost to the flushing fluid or radiation [86]. However, when the instantaneous energy rate exceeds a certain limit depending on the thermal properties of the wire material, the wire will break. Several authors [90–92] investigated the influence of the various machining parameters on the thermal load of the wire and developed a thermal model simulating the WEDM process. In addition to the sparking characteristics or the temperature distribution, the mechanical strength of the wire also has a significant effect on the occurrence of the wire breakage. Luo [93] claimed that the wire material yielding and fracture contribute to the wire breakage, whilst an increase in temperature aggravates the failure process.

3.2.2.2. Wire lag and wire vibration. The main factors contributing to the geometrical inaccuracy of the WEDMed part are the various process forces acting on the wire causing it to depart from the programmed path. These forces include the mechanical forces produced by the pressure from the gas bubbles formed by the plasma of the erosion mechanism, axial forces applied to straighten the wire, the hydraulic forces induced by the flushing, the electro-static forces acting on the wire and the electro-dynamic forces inherent to the spark generation [94,95].

As a result, the static deflection in the form of a lag effect of the wire is critically studied in order to produce an accurate cutting tool path. Several authors [93,96,97] performed a parametric study on the geo-metrical inaccuracy of the part caused by the wire lag and attempted to model WEDM process mathematically. Whereas Beltrami and Dauw [98] monitored and controlled the wire position online by means of an optical sensor with a control algorithm enabling virtually any contour to be cut at a relatively high cutting speed. A number of geometric tool motion compensation methods, which increase the machining gap and prevent gauging or wire breakages when cutting areas with high curvatures such as corners with small radii have also been developed [99,100]. Lin et al. [101] developed a control strategy based on the fuzzy logic to improve the machining accuracy and concentrated sparking at corner parts without affecting the cutting feed rates.

In addition, the dynamic behavior of the wire during WEDM is also restrained to avoid cutting inaccuracies. There are a few discussions on the design and development of a monitoring and control system for compensating the behavior of the wire vibration [86,102]. Dauw et al. [103] also

reported that the vibration of the wire can be substantially reduced when the wire and the wire guides are completely submerged in the working tank filled with deionised water. Several authors [104] derived a mathematical model analysing the transient response of the wire vibration based on the force acting on the tool wire in a single discharge process. A number of authors [105,106] reviewed the research and development of the various advanced monitoring and control systems used in EDM and WEDM processes.

In addition, the dynamic behavior of the wire during WEDM is also restrained to avoid cutting inaccuracies. There are a few discussions on the design and development of a monitoring and control system for compensating the behavior of the wire vibration [86,102]. Dauw et al. [103] also reported that the vibration of the wire can be substantially reduced when the wire and the wire guides are completely submerged in the working tank filled with deionised water. Several authors [104] derived a mathematical model analysing the transient response of the wire vibration based on the force acting on the tool wire in a single discharge process. A number of authors [105,106] reviewed the research and development of the various advanced monitoring and control systems used in EDM and WEDM processes.

3.2.3. Self-tuning adaptive control systems

In recent years, the WEDM research and development has explored control strategies adjusting to the variation in the power density required in machining a workpiece with varying thickness. Several authors [82,85] found out that a change in the workpiece thickness during machining leads to an increase in the wire thermal density and an eventual breaking of the wire. Rajurkar et al. [107,108] proposed an adaptive control system with a multiple input model that monitors and controls the sparking frequency according to the online identified workpiece height. Other authors [72] developed a system that involves an explicit mathematical model requiring a number of experiments and statistical techniques. Yan et al. [109] used the neural networks to estimate the workpiece height and the fuzzy control logic to suppress the wire breakage when a workpiece with variable height is machined.

The application of a knowledge-based control system to control the adverse WEDM conditions has also been experimented. Snoeys et al. [110] proposed a knowledge-based system, which comprises of three modules, namely work preparation, process control and operator assistance or fault diagnosis, enabling the monitoring and control of the WEDM process. The work preparation module determines the optimal machining parameter settings, while the operator

assistance and fault diagnostics databases advise the operators and diagnose the machining errors. Thus, the capabilities of these modules increase the amount of autonomy given to the WEDM machine. Huang and Liao [111] have also indicated the importance of the operator assistance and fault diagnostics systems for the WEDM process. They proposed a prototype artificial neural network-based expert system for the maintenance schedule and fault diagnosis of the WEDM. Dekeyser et al. [112] developed a thermal model integrated with an expert system for predicting and controlling the thermal overload experienced on the wire. Although the model increases the level of machine autonomy, it requires a large amount of computation, which slows down the processing speed and undermines the online control performance.

4. Discussion and future research directions

The authors have classified the wide range of published works relating to the WEDM process into three major areas, namely optimizing the process variables, monitoring and control the process, and WEDM developments. This section discusses the classified WEDM research areas and the possible future research directions, illustrated in Fig. 1.

4.1. Optimizing the process variables

The optimization of the WEDM process often proves to be a difficult task owing to the many regulating machining variables. A single parameter change will influence the process in a complex way [52]. Thus, the various factors affecting the process has to be understood in order to determine the trends of the process variation, as discussed in Section 4.1.1. The selection of the best combination of the process parameters for an optimal machining performance involves analytical and statistical methods. However, it is very complicated to relate the input process parameter with the output performance measures and derive an optimal result using a simulated algorithm. The CR, MRR and SR are usually opted as the measures of the process performance. Nevertheless, these methods provide an effective means of identifying the variables affecting the machining performance.

In addition, the modeling of the process is also an effective way of solving the tedious problem of relating the process parameters to the performance measures. As mentioned in Section 4.1.2, several attempts have been carried out to model the process investigating into the influence of the machining parameters on WEDM performance and identifying the optimal machining condition from the infinite number of combinations. As a result, it provides an accurate dimensional inspection and verification of the process yielding a better stability and higher productivity for the WEDM

process. However, the complex and random nature of the erosion process in WEDM requires the application of deterministic as well as stochastic techniques [61]. Therefore, the optimization of the WEDM process will remain a key research area matching the numerous process parameters with the performance measures.

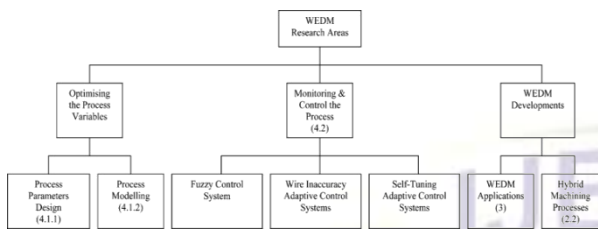


Fig. 1. Classification of major WEDM research areas (corresponding section numbers are in brackets).

4.2. Monitoring and control the process

Over the years, the monitoring and control systems have made an important contribution in minimizing the effect of disturbances on the WEDM performance. The multi-parameter machining settings have made it difficult to clearly understand and obtain the optimal machining conditions. It requires a control algorithm that is often based on explicit mathematical and statistical models to cope with the machining process. However, the application of the fuzzy control logic has brought about a drastic change to the conventional way of monitoring and controlling the WEDM process. The fuzzy control logic is able to consider several machining variables, weigh the significant factors affecting the process and make changes to the machining conditions without applying the detailed mathematical model, as mentioned in Section 4.2.1. In addition, the feasibility of applying the expert system capable of giving advice and solving problems has also been explored [110]. Such a system would greatly appeal to the shop floor operational needs demanding unattended WEDM operation.

The risk of the wire breakage and the bending of the wire have also limited the efficiency and accuracy of the WEDM process. The occurrence of the wire breakage directly reduces the already low machining speed affecting the overall productivity of the machining process. Although, the control strategies reported in Section 4.2.2 are designed to solve the problems of wire break-age, it solely relies on the indication of the possible Occurrence and generates inadequate results investigating the root cause of the wire breakage phenomenon. These strategies may therefore be deemed to be a set-back when machining a workpiece with variable heights requiring a drastic change in the machining conditions.

In addition, the wire vibration behavior and static deflection easily influence the geometric accuracy of the part produced. The typical solutions to these problems are often very conservative in nature by increasing the machining gap or reducing the discharge energy, which is regarded to be a main drawback for the WEDM process efficiency. Fig. 2 shows the huge amount of research work concentrating on the improvement of the inaccuracy caused by the wire through the application of an adaptive control system. Jennes and Snoey [113] believed that the traditional research purpose was not to improve machining efficiency, but to prevent from wire rupture during the machining process. Hence, one possible new WEDM challenge and future work area will be steered towards attaining higher machining efficiency by acquiring a higher CR and MRR with a low wire consumption and frequency of wire breakage.

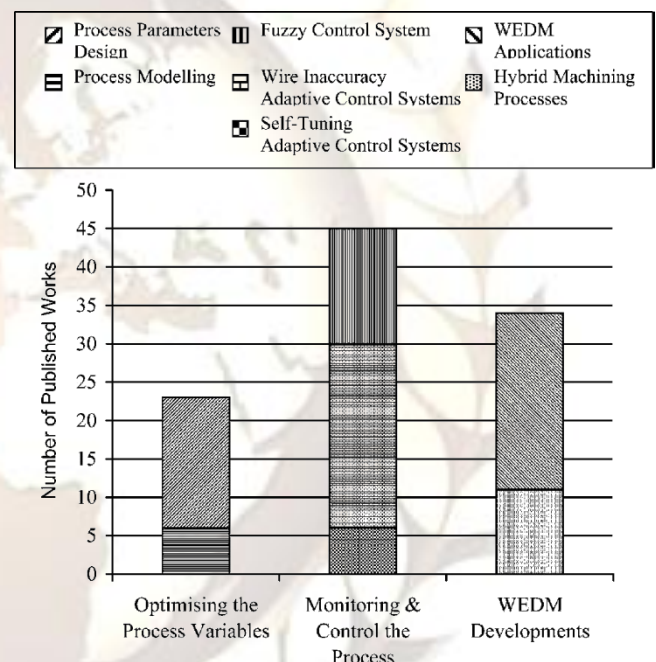


Fig. 2. Distribution of the collection WEDM research publications.

4.3 Developments

The WEDM process is a suitable machining option in meeting the demands of today's modern applications. It has been commonly used in the automotive, aerospace, mould, tool and die making industries. WEDM applications can also be found in the medical, optical, dental, jewellery industries, and in the automotive and aerospace R&D areas [114]. Its large pool of applications, as shown in Fig. 2, is largely owed to the machining technique, which is not restricted by the hardness, strength or toughness of the workpiece material. As mentioned in Section 3, the WEDM of the HSTR, modern composite and advanced ceramic materials, which is showing a growing trend in many engineering applications, has also been

experimented. It has replaced the conventional means of machining ceramics, namely the ultrasonic machining and laser beam machining, which are not only costly to machine but damage the surface integrity of the ceramic component. However, with the introduction of over 20 non-traditional machining processes in the past 50 years and the rapid growth in the development of harder, tougher and stronger workpiece materials [115], the WEDM process inevitably has to be constantly rejuvenated in order to compete and satisfy the future crucial machining requirements.

In addition, the WEDM process has sought the benefits of combining with other material removal methods to further expand its applications and improve the machining characteristics. The authors have classified the WEDM machine into the various physical characteristics, which clearly distinguishes the different types of machine features affecting the performance measures, machining capacity and auxiliary facilities, as shown in Fig. 3. One of the most practical and precision HMP arrangements is the WEDG process used mainly to produce small size and complicated shape thin rod, which can be easily bent or broken by the lateral force when using conventional grinding process. The precision of the CNC system is also partly responsible for the accuracy of the WEDG [116]. Therefore, the HMP processes, in particular the WEDG process, will continue to receive intense research attention especially in the growing field of micro-electronics circuitry manufacturing.

There is also a major push toward an unattended WEDM operation attaining a machining performance level that can be only achieved by a skilled operator. Such a goal has been partly fulfilled through the application of the CNC to control the machining strategies, to prevent the wire breakage and to automate the self-threading systems. An environmentally friendly and high-capacity dielectric regeneration system, which autonomously maintains the quality of the dielectric circulating within the WEDM machine, has also been experimented [117]. However, due consideration still has to be given to improve the WEDM performance and enhance the level of automation for future integration of the EDM and WEDM processes within the CIM environment [118]. It would then be able to reasonably meet the shortage of highly skilled EDM/ WEDM operators and achieve a more cost efficient and cost effective machining operation.

5. Conclusion

WEDM is a well-established non-conventional material removal process capable of meeting the diverse machining requirements posed by the demanding metal cutting industries. It has

been commonly applied for the machining and micro-machining of parts with intricate shapes and varying hardness requiring high profile accuracy and tight dimensional tolerances. However the main disadvantage of the process is the relatively low machining speed, as compared to the other non-traditional machining processes such as the laser-cutting process, largely due to its thermal machining technique. In addition, the development of newer and more exotic materials has challenged the viability of the WEDM process in the future manufacturing environment. Hence, continuous improvement needs to be made to the current WEDM traits in order to extend the machining capability and increase the machining productivity and efficiency.

The ultimate goal of the WEDM process is to achieve an accurate and efficiency machining operation without compromising the machining performance. This is mainly carried out by understanding the inter-relationship between the various factors affecting the process and identifying the optimal machining condition from the infinite number of combinations. The adaptive monitoring and control systems have also been extensively implemented to tame the transient WEDM behavior without the risk of wire breakages. Moreover, several monitoring and control algorithms based on the explicit mathematical models, expert's knowledge or intelligent systems have been reported to reduce the inaccuracy caused by the vibration behavior and static deflection of the wire. With the continuous trend towards unattended machining operation and automation, the WEDM process has to be constantly improved to maintain as a competitive and economical machining operation in the modern tool-room manufacturing arena. Though the authors believe that the WEDM process due to its ability to efficiently machine parts with difficult-to-machine materials and geometries has its own application area unmatched by other manufacturing processes.

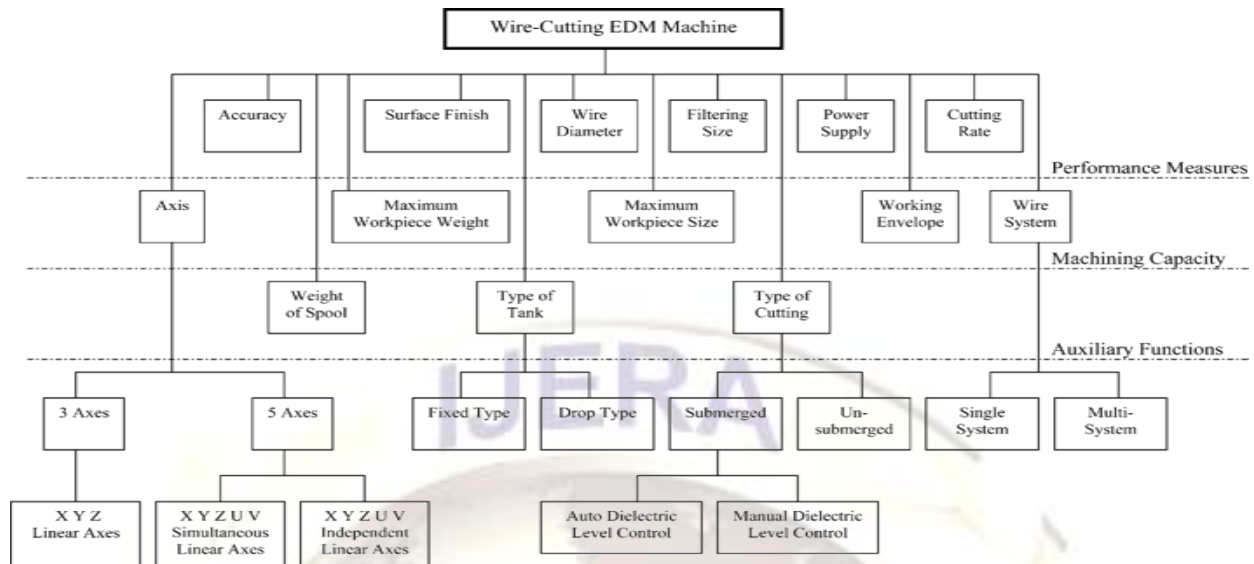


Fig. 3. Classification of wire-cutting EDM machine.

References

- [1] E.C. Jameson, Description and development of electrical discharge machining (EDM), Electrical Discharge Machining, Society of Manufacturing Engineers, Dearborn, Michigan, 2001, pp. 16.
- [2] G.F. Benedict, Electrical discharge machining (EDM), Non-Traditional Manufacturing Processes, Marcel Dekker, Inc, New York & Basel, 1987, pp. 231–232.
- [3] K.H. Ho, S.T. Newman, State of the art electrical discharge machining (EDM), Int. J. Mach. Tools Manuf. 43 (13) (2003) 1287–1300.
- [4] A.B. Puri, B. Bhattacharyya, An analysis and optimization of the geometrical inaccuracy due to wire lag phenomenon in WEDM, Int. J. Mach. Tools Manuf. 43 (2) (2003) 151–159.
- [5] E.I. Shobert, What happens in EDM, in: E.C. Jameson (Ed.), Electrical Discharge Machining: Tooling, Methods and Applications, Society of Manufacturing Engineers, Dearborn, Michigan, 1983, pp. 3–4.
- [6] H.C. Tsai, B.H. Yan, F.Y. Huang, EDM performance of Cr/ Cu-based composite electrodes, Int. J. Mach. Tools Manuf. 43 (3) (2003) 245–252.
- [7] G. Boothroyd, A.K. Winston, Non-conventional machining processes, Fundamentals of Machining, Marcel Dekker, Inc, 1989, pp. 491.
- [8] J.A. McGeough, Electrodischarge machining, Advanced Methods of Machining, Chapman & Hall, London, 1988, pp. 130.
- [9] S.F. Krar, A.F. Check, Electrical discharge machining, Technology of Machine Tools, Glencoe/McGraw-Hill, New York, 1997, pp. 800.
- [10] M. Kunieda, C. Furudate, High precision finish cutting by dry WEDM, Ann. CIRP 50 (1) (2001) 121–124.
- [11] S. Kalpajian, S.R. Schmid, Material removal processes: abrasive, chemical, electrical and high-energy beam, Manufacturing Processes for Engineering Materials, Prentice Hall, New Jersey, 2003, pp. 544.
- [12] E.A. Huntress, Electrical discharge machining, Am. Machinist 122 (8) (1978) 83–98.
- [13] T. Masuzawa, H.K. Tonshoff, Three-dimensional micromachining by machining tools, Ann. CIRP 46 (2) (1997) 621–628.
- [14] T. Masuzawa, M. Fujino, K. Kobayashi, T. Suzuski, N. Kinoshita, Wire electro-discharge grinding for micro-machining, Ann. CIRP 34 (1) (1985) 431–434.
- [15] T. Masuzawa, C.L. Kuo, M. Fujino, A combined electrical machining process for micronozzle fabrication, Ann. CIRP 43 (1994) 189–192.
- [16] T. Masuzawa, J. Tsukamoto, M. Fujino, Drilling of deep microholes by EDM, Ann. CIRP 38 (1) (1989) 195–198.
- [17] H.H. Langen, T. Masuzawa, M. Fujino, Modular method for microparts machining

- and assembly with self-alignment, *Ann. CIRP* 44 (1) (1995) 173–176.
- [18] K. Egashira, K. Mizutani, Ultrasonic vibration drilling of microholes in glass, *Ann. CIRP* 51 (1) (2002) 339–342.
- [19] X.Q. Sun, T. Masuzawa, M. Fujino, Micro ultrasonic machining and its applications in MEMS, *Sensors Actuators A57* (2) (1996) 159–164.
- [20] Z.N. Guo, T.C. Lee, T.M. Yue, W.S. Lau, A study of ultra-sonic-aided wire electrical discharge machining, *J. Mater. Process. Technol.* 63 (1–3) (1997) 823–828.
- [21] J. Qu, A.J. Shih, R.O. Scattergood, Development of the cylindrical wire electrical discharge machining process, part 1: concept, design, and material removal rate, *J. Manuf. Sci. Eng.* 124 (2002) 702–707.
- [22] B.K. Rhoney, A.J. Shih, R.O. Scattergood, J.L. Akemon, D.J. Grant, M.B. Grant, Wire electrical discharge machining of metal bond diamond wheels for ceramic grinding, *Inter. J. Mach. Tools Manuf.* 42 (12) (2002) 1355–1362.
- [23] J. Qu, A.J. Shih, R.O. Scattergood, Development of the cylindrical wire electrical discharge machining process, part 2: surface integrity and roundness, *J. Manuf. Sci. Eng.* 124 (3) (2002) 708–714.
- [24] Y.F. Luo, C.G. Chen, Z.F. Tong, Investigation of silicon wafering by wire EDM, *J. Mater. Sci.* 27 (21) (1992) 5805–5810.
- [25] G.N. Levy, R. Wertheim, EDM-machining of sintered carbide compacting dies, *Ann. CIRP* 37 (1) (1988) 175–178.
- [26] B.K. Rhoney, A.J. Shih, R.O. Scattergood, R. Ott, S.B. McSpadden, Wear mechanism of metal bond diamond wheels trued by wire electrical discharge machining, *Wear* 252 (7–8) (2002) 644–653.
- [27] A. Kruusing, S. Leppavuori, A. Uusimaki, B. Petretis, O. Makarova, Micromachining of magnetic materials, *Sensors Actuators* 74 (1–3) (1999) 45–51.
- [28] G.L. Benavides, L.F. Bieg, M.P. Saavedra, E.A. Bryce, High aspect ratio meso-scale parts enables by wire micro-EDM, *Microsys. Technol.* 8 (6) (2002) 395–401.
- [29] J.A. Sanchez, I. Cabanes, L.N. Lopez de Lacalle, A. Lamikiz, Development of optimum electrodischarge machining technology for advanced ceramics, *Inter. J. Adv. Manuf. Technol.* 18 (12) (2001) 897–905.
- [30] Y.M. Cheng, P.T. Eubank, A.M. Gadalla, Electrical discharge machining of ZrB₂-based ceramics, *Mater. Manuf. Processes* 11(1996) 565–574.
- [31] T. Matsuo, E. Oshima, Investigation on the optimum carbide content and machining condition for wire EDM of zirconia cer-amics, *Ann. CIRP* 41 (1) (1992) 231–234.
- [32] Y.K. Lok, T.C. Lee, Processing of advanced ceramics using the wire-cut EDM process, *J. Mater. Process. Technol.* 63 (1–3) (1997) 839–843.
- [33] D.F. Dauw, C.A. Brown, J.P. Van griethuysen, J.F.L.M. Albert, Surface topography investigations by fractal analysis of spark-eroded, electrically conductive ceramics, *Ann. CIRP* 39 (1990) 161–165.
- [34] W. Konig, D.F. Dauw, G. Levy, U. Panten, EDM-future steps towards the machining of ceramics, *Ann. CIRP* 37 (2) (1988) 623–631.
- [35] R.F. Firestone, *Ceramic—Applications in Manufacturing*, Society of Manufacturing Engineers, Michigan, 1988, pp. 133.
- [36] N. Mohri, Y. Fukuzawa, T. Tani, N. Saito, K. Furutani, Assisting electrode method for machining insulating ceramics, *Ann. CIRP* 45 (1) (1996) 201–204.
- [37] N. Mohri, Y. Fukuzawa, T. Tani, T. Sata, Some considerations to machining characteristics of insulating ceramics—towards practical use in industry, *Ann. CIRP* 51 (1) (2002) 161–164.
- [38] W.S. Lau, W.B. Lee, A comparison between EDM wire-cut and laser cutting of carbon fibre composite materials, *Mater. Manuf. Processes* 6 (2) (1991) 331–342.
- [39] W.S. Lau, T.M. Yue, T.C. Lee, W.B. Lee, Un-conventional machining of composite materials, *J. Mater. Process. Technol.* 48 (1–4) (1995) 199–205.
- [40] A.M. Gadalla, W. Tsai, Machining of WC-Co composites, *Mater Manuf. Processes* 4 (3) (1989) 411–423.
- [41] B.H. Yan, C.C. Wang, W.D. Liu, F.Y. Huang, Machining characteristics of Al₂O₃/6061Al composite using rotary EDM with a dislike electrode, *Inter. J. Adv. Manuf. Technol.* 16 (5) (2000) 322–333.
- [42] T.M. Yue, Y. Dai, W.S. Lau, An examination of wire electrical discharge machining (WEDM) of Al₂O₃ particulate reinforced aluminium based composites, *Mater. Manuf. Processes* 11 (3) (1996) 341–350.
- [43] Z.N. Guo, X. Wang, Z.G. Huang, T.M. Yue, Experimental investigation into shaping particle-reinforced material by WEDM-HS, *J. Mater. Process. Technol.* 129 (1–3) (2002) 56–59.

- [44] G.A. Alekseyev, M.V. Korenblum, Analysis of the Conditions for the High Efficiency Wire Cut EDM, Proceedings of the Ninth International Symposium for Electro-Machining (ISEM-9), Nagoya, Japan, 1989.
- [45] Y. Suzuki, M. Kishi, Improvement of Surface Roughness in wire EDM, Proceedings of the Ninth International Symposium for Electro-Machining (ISEM-9), Nagoya, Japan, 1989.
- [46] Y.F. Luo, An energy-distribution strategy in fast-cutting wire EDM, *J. Mater. Process. Technol.* 55 (3-4) (1995) 380-390.
- [47] D.F. Dauw, L. Albert, About the evolution of wire tool performance in wire EDM, *Ann. CIRP* 41 (1) (1992) 221-225.
- [48] G.N. Levy, F. Maggi, WED machinability comparison of different steel grades, *Ann. CIRP* 39 (1) (1990) 183-185.
- [49] R. Konda, K.P. Rajurkar, R.R. Bishu, A. Guha, M. Parson, Design of experiments to study and optimize process performance, *Inter. J. Qual. Reliab. Manage.* 16 (1) (1999) 56-71.
- [50] Y.S. Tarn, S.C. Ma, L.K. Chung, Determination of optimal cutting parameters in wire electrical discharge machining, *Inter. Mach. Tools Manuf.* 35 (12) (1995) 1693-1701.
- [51] J.T. Huang, Y.S. Liao, W.J. Hsue, Determination of finish-cutting operation number and machining-parameters setting in wire electrical discharge machining, *J. Mater. Process. Technol.* 87 (1-3) (1999) 69-81.
- [52] D. Scott, S. Boyina, K.P. Rajurkar, Analysis and optimization of parameter combination in wire electrical discharge machining, *Inter. J. Prod. Res.* 29 (11) (1991) 2189-2207.
- [53] Y.S. Liao, J.T. Huang, H.C. Su, A study on the machining parameters optimization of wire electrical discharge machining, *Mater. Process. Technol.* 71 (3) (1997) 487-493.
- [54] M. Rozenek, J. Kozak, L. Dabrowski, K. Lubkowski, Electrical discharge machining characteristics of metal matrix composites, *J. Mater. Process. Technol.* 109 (3) (2001) 367-370.
- [55] J.T. Huang, Y.S. Liao, Optimization of machining parameters of wire-EDM based on grey relational and statistical analyses, *Inter. J. Prod. Res.* 41 (8) (2003) 1707-1720.
- [56] K.P. Rajurkar, W.M. Wang, Thermal modelling and on-line monitoring of wire-EDM, *J. Mater. Process. Technol.* 38 (1-2) (1993) 417-430.
- [57] M.I. Go'kler, A.M. Ozano'zgu', Experimental investigation of effects of cutting parameters on surface roughness in the WEDM process, *Inter. J. Mach. Tools Manuf.* 40 (13) (2000) 1831-1848.
- [58] N. Tosun, C. Cogun, A. Inan, The effect of cutting parameters on workpiece surface roughness in wire EDM, *Machining Sci. Technol.* 7 (2) (2003) 209-219.
- [59] K.N. Anand, Development of process technology in wire-cut operation for improving machining quality, *Total Quality Management* 7 (1) (1996) 11-28.
- [60] T.A. Spedding, Z.Q. Wang, Parametric optimization and surface characterization of wire electrical discharge machining process, *Precision Eng.* 20 (1) (1997) 5-15.
- [61] R.E. Williams, K.P. Rajurkar, Study of wire electrical discharge machined surface characteristics, *J. Mater. Process. Technol.* 28 (1-2) (1991) 127-138.
- [62] T.A. Spedding, Z.Q. Wang, Study on modeling of wire EDM process, *J. Mater. Process. Technol.* 69 (1-3) (1997) 18-28.
- [63] C.L. Liu, D. Esterling, Solid modeling of 4-axis wire EDM cut geometry, *Computer-Aided Des.* 29 (12) (1997) 803-810.
- [64] W.J. Hsue, Y.S. Liao, S.S. Lu, Fundamental geometry analysis of wire electrical discharge machining in corner cutting, *Inter. J. Mach. Tools Manuf.* 39 (4) (1999) 651-667.
- [65] G. Spur, J. Scho'nebeck, Anode erosion in wire-EDM—a theoretical model, *Ann. CIRP* 42 (1) (1993) 253-256.
- [66] F. Han, M. Kunieda, T. Sendai, Y. Imai, High precision simulation of WEDM using parametric programming, *Ann. CIRP* 51 (1) (2002) 165-168.
- [67] N. Kinoshita, M. Fukui, H. Shichida, G. Gamo, T. Sata, Study on E.D.M. with wire electrode; gap phenomena, *Ann. CIRP* 25 (1976) 141-145.
- [68] S.M. Pandit, W.H. Wittig, A data-dependent systems approach to optimal microcomputer control illustrated by EDM, *J. Eng. Ind. (Trans. ASME)* 106 (2) (1984) 137-142.
- [69] K.P. Rajurkar, W.M. Wang, Real-time stochastic model and control of EDM, *Ann. CIRP* 39 (1) (1990) 187-190.
- [70] V. Garbajs, Statistical model for an adaptive control of EDM-process, *Ann. CIRP* 34 (1) (1985) 499-502.
- [71] H. Watanabe, T. Sato, I. Suzuki, N.

- Kinoshita, WEDM monitoring with a statistical pulse-classification method, *Ann. CIRP* 39 (1) (1990) 175–178.
- [72] Y.H. Huang, G.G. Zhao, Z.R. Zhang, C.Y. Yau, The identification and its means of servo feed adaptive control system in WEDM, *Ann. CIRP* 35 (1) (1986) 121–123.
- [73] Y.S. Liao, J.C. Woo, The effects of machining settings on the behavior of pulse trains in the WEDM process, *J. Mater. Process. Technol.* 71 (3) (1997) 433–439.
- [74] M.T. Yan, Y.S. Liao, Adaptive Control of WEDM Process Using the Fuzzy Control Strategy, *Proceedings of the Eleventh International Symposium for Electro-Machining (ISEM-11)*, Lausanne, Switzerland, 1995.
- [75] M.T. Yan, Y.S. Liao, Adaptive control of WEDM process using the fuzzy control strategy, *J. Manuf. Syst.* 17 (4) (1998) 263–274.
- [76] M. Boccadoro, D.F. Dauw, About the application of fuzzy controllers in high-performance die-sinking EDM machines, *Ann. CIRP* 44 (1) (1995) 147–150.
- [77] M.T. Yan, H.P. Li, J.F. Liang, The application of fuzzy control strategy in servo feed control of wire electrical discharge machining, *Inter. J. Adv. Manuf. Technol.* 15 (11) (1999) 780–784.
- [78] Y.S. Liao, J.C. Woo, A New Fuzzy Control System for the Adaptive Control of WEDM Process, *Proceedings of the Twelfth International Symposium for Electro-Machining (ISEM-12)*, Aachen, Germany, 1998.
- [79] Y.S. Liao, J.C. Woo, Design of a fuzzy control system for the adaptive control of WEDM process, *Inter. J. Mach. Tools Manuf.* 40 (15) (2000) 2293–2307.
- [80] C. Cogun, A technique and its applications for evaluation of material removal contributions of pulses in electrical discharge machining, *Inter. J. Mach. Tools Manuf.* 30 (1) (1990) 19–31.
- [81] H.E. de Bruyn, A.J. Pekelharing, Has the delay time influence on the EDM-process? *Ann. CIRP* 31 (1) (1982) 103–106.
- [82] N. Kinoshita, M. Fukui, G. Gamo, Control of wire-EDM preventing electrode from breaking, *Ann. CIRP* 31 (1) (1982) 111–114.
- [83] K. Shoda, Y. Kaneko, H. Nishimura, M. Kunieda, M.X. Fan, Adaptive Control of WEDM with On-line Detection of Spark Locations, *Proceeding of the Tenth International Symposium for Electro-Machining (ISEM-10)*, Magdeburg, Germany, 1992.
- [84] M. Kunieda, H. Kojima, N. Kinoshita, On-line detection of EDM spark location by multiple connection of branched electric wires, *Ann. CIRP* 39 (1) (1990) 171–174.
- [85] T. Tanimura, C.J. Heuvelman, P.C. Vennstra, The properties of the servo gap sensor with wire spark-erosion machining, *Ann. CIRP* 26 (1) (1977) 59–63.
- [86] K.P. Rajurkar, W.M. Wang, R.P. Lindsay, On-line monitor and control for wire breakage in WEDM, *Ann. CIRP* 40 (1) (1991) 219–222.
- [87] Y.S. Liao, Y.Y. Chu, M.T. Yan, Study of wire breaking process and monitoring of WEDM, *Inter. J. Mach. Tools Manuf.* 37 (4) (1997) 555–567.
- [88] M.T. Yan, Y.S. Liao, Monitoring and self-learning fuzzy control for wire rupture prevention in wire electrical discharge machining, *Inter. J. Mach. Tools Manuf.* 36 (3) (1996) 339–353.
- [89] M.T. Yan, Y.S. Liao, A self-learning fuzzy controller for wire rupture prevention in WEDM, *Inter. J. Adv. Manuf. Technol.* 11 (4) (1996) 267–275.
- [90] M. Jennes, W. Dekeyser, R. Snoeys, Comparison of various approaches to model the thermal load on the EDM-wire electrode, *Ann. CIRP* 33 (1) (1984) 93–98.
- [91] H. Obara, Y. Iwata, T. Ohsumi, An Attempt to Detect Wire Temperature Distribution During Wire EDM, *Proceedings of the Eleventh International Symposium for Electro-Machining (ISEM-11)*, Lausanne, Switzerland, 1995.
- [92] W. Dekeyser, R. Snoeys, M. Jennes, A thermal model to investigate the wire rupture phenomenon for improving performance in EDM wire cutting, *J. Manuf. Syst.* 4 (2) (1985) 179–190.
- [93] Y.F. Luo, Rupture failure and mechanical strength of the electrode wire used in wire EDM, *J. Mater. Process. Technol.* 94 (2–3) (1999) 208–215.
- [94] D.F. Dauw, I. Beltrami, High-precision wire-EDM by online wire positioning control, *Ann. CIRP* 43 (1) (1994) 193–197.
- [95] N. Kinoshita, M. Fukui, Y. Kimura, Study on Wire-EDM: in process measurement of mechanical behaviour of electrode-wire, *Ann. CIRP* 33 (1) (1984) 89–92.
- [96] A.B. Puri, B. Bhattacharyya, An analysis and optimisation of the geometrical inaccuracy due to wire lag phenomenon in WEDM, *Inter. J. Mach. Tools Manuf.* 43 (2) (2003) 151–159.
- [97] J.T. Huang, Y.S. Liao, A Study of Finish

- Cutting Operation Number and Machining Parameters Setting in Wire Electrical Discharge Machining, Proceedings of International Conference on Precision Machining (ICPE'97), Taipei, Taiwan, 1997.
- [98] I. Beltrami, D. Dauw, A simplified post process for wire cut EDM, *J. Mater. Process. Technol.* 58 (4) (1996) 385–389.
- [99] J. Wang, B. Ravani, Computer aided contouring operation for travelling wire electric discharge machining (EDM), *Computer-Aided Des.* 35 (10) (2003) 925–934.
- [100] W.L. Dekeyser, R. Snoeys, Geometric Accuracy of Wire EDM, Proceedings of the Ninth International Symposium for Electro-Machining (ISM-9), Nagoyo, Japan, 1989.
- [101] C.T. Lin, I.F. Chung, S.Y. Huang, Improvement of machining accuracy by fuzzy logic at corner parts of wire-EDM, *Fuzzy Sets Syst.* 122 (3) (2001) 499–511.
- [102] S. Enache, C. Opran, Dynamic stability of the technological machining system in EDM, *Ann. CIRP* 42 (1) (1993) 209–214. D.F. Dauw, H. Sthitoul, C. Tricarico, Wire analysis and control for precision EDM cutting, *Ann. CIRP* 38 (1) (1989) 191–194.
- [103] N. Mohri, H. Yamada, K. Furutani, T. Narikiyo, T. Magara, System identification of wire electrical discharge machining, *Ann. CIRP* 47 (1) (1998) 173–176.
- [104] K.P. Rajurkar, W.M. Wang, Improvement of EDM performance with advanced monitoring and control systems, *J. Manuf. Sci. Eng.* 119 (1997) 770–775.
- [105] R. Snoeys, D.F. Dauw, J.P. Kruth, Survey of EDM adaptive control in electro discharge machining, *J. Manuf. Syst.* 2 (2) (1983) 147–164.
- [106] K.P. Rajurkar, W.M. Wang, J.A. McGeough, WEDM identification and adaptive control for variable-height components, *Ann. CIRP* 43 (1) (1994) 199–202.
- [107] K.P. Rajurkar, W.M. Wang, W.S. Zhao, WEDM-adaptive control with a multiple input model for identification of work-piece height, *Ann. CIRP* 46 (1) (1997) 147–150.
- [108] M.T. Yan, Y.S. Liao, C.C. Chang, On-line estimation of work-piece height using neural networks and hierarchical adaptive control of WEDM, *Inter. J. Adv. Manuf. Technol.* 18 (12) (2001) 884–891.
- [110] R. Snoeys, W. Dekeyser, C. Tricarico, Knowledge-based system for wire EDM, *Ann. CIRP* 37 (1) (1998) 197–202.
- [111] J.T. Huang, Y.S. Liao, A wire-EDM maintenance and fault-diagnosis expert system integrated with an artificial neural network, *Inter. J. Prod. Res.* 38 (5) (2000) 1071–1082.
- [112] W. Dekeyser, R. Snoeys, M. Jennes, Expert system for wire cutting EDM based on pulse classification and thermal modeling, *Robotics Comput. Integrated Manuf.* 4 (1–2) (1988) 219–224.
- [113] M. Jennes, R. Snoey, Correlation between EDM data and machining settings, *Ann. CIRP* 24 (2) (1984) 83–88.
- [114] D.R. Stovicek, The state-of-the-art EDM Science, in: *Tooling and Production*, Nelson Publishing Inc., Ohio, US, 59 (2) May 1993, pp. 42.
- [115] S.H. Yeo, B.K.A. Ngoi, L.S. Poh, C. Hang, Cost-tolerance relationships for non-traditional machining processes, *Inter. J. Adv. Manuf. Technol.* 13 (1) (1997) 35–41.
- [116] R. Snoeys, F. Staelens, W. Dekeyser, Current trends in non-conventional material removal processes, *Ann. CIRP* 35 (2) (1986) 467–480.
- [117] G.N. Levy, Environmentally friendly and high-capacity dielectric regeneration for wire EDM, *Ann. CIRP* 42 (1) (1993) 227–230.
- [118] M.F. DeVries, N.A. Duffie, J.P. Kruth, D.F. Dauw, B. Schumacher, Integration of EDM within a CIM environment, *Ann. CIRP* 39 (2) (1990) 665